

# DIGITUS VGA Monitor Connection Cable

**DB-310100-018-S**  
**EAN 4016032383482**



## VGA Monitor connection cable, HD15 M/M, 1.8m, 3Coax/4C, bl

With the DIGITUS® VGA Monitor Connection Cable, an excellent connection is guaranteed between your computer / notebook and your monitor. The gold-plated contact surfaces and triple shielding ensure loss-free data transfer. The analog video signals from your computer are transmitted to the monitor or projector clearly, in true color and in 1080p (Full HD).

### Extend your notebook display to include a VGA display

- Supports resolutions of up to 1080p with 60 Hz

### Attributes

- Assortment: VGA Cables
- AWG: 28/30

- Color cable: black
- Color connector: black
- Connector 1: HD DSUB, 15-pin, plug
- Connector 2: HD DSUB, 15-pin, plug
- Connector surface: gold-plated
- Display Data Channel: DDC2
- Ferrite filter: 2 x ferrite beads
- Hoods: molded
- Length: 1.8 m
- Shielding: triple shielding


### Package contents

- 1 x VGA monitor connection cable

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	5.00	67.00	30.00	35.00	70,350.00
Packaging Unit Inside	5	1.25	32.00	28.00	16.00	14,336.00
Packaging Unit Single	1	0.25	6.00	15.00	23.50	2,115.00
Net single without Packaging	1	0.25	4.00	10.00	20.00	0.00

## More images:

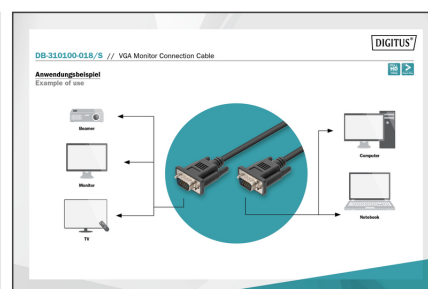

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)