

DIGITUS HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km, with DDM Feature

DN-81004-01
EAN 4016032391555



1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1550nm/Rx1310nm, up to 20km, HP

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- HP compatible
- HP-Aruba compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex
- Wavelength: Tx 1550nm / Rx 1310nm


- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Suitable Module for Opposite Side: DN-81003
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1550/1310 nm
- DDM Support: yes
- Broadcasting Mode: Bidirectional
- Manufacturer compatibility: HP, Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- SFP module
- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	1	0.04	11.60	5.50	3.00	191.40
Packaging Unit Single	1	0.04	11.50	5.50	3.00	189.75
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

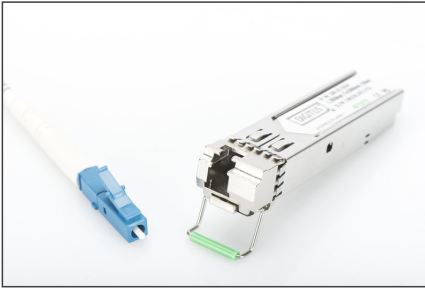

SFP Modules							
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature	Additional Notes
DA-P401	4010000000001	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P402	4010000000002	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P403	4010000000003	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P404	4010000000004	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P405	4010000000005	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P406	4010000000006	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P407	4010000000007	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P408	4010000000008	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P409	4010000000009	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P410	4010000000010	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P411	4010000000011	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P412	4010000000012	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P413	4010000000013	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P414	4010000000014	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P415	4010000000015	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P416	4010000000016	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P417	4010000000017	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P418	4010000000018	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P419	4010000000019	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P420	4010000000020	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P421	4010000000021	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P422	4010000000022	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P423	4010000000023	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P424	4010000000024	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P425	4010000000025	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P426	4010000000026	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P427	4010000000027	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P428	4010000000028	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P429	4010000000029	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P430	4010000000030	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P431	4010000000031	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P432	4010000000032	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P433	4010000000033	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P434	4010000000034	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P435	4010000000035	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P436	4010000000036	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P437	4010000000037	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P438	4010000000038	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P439	4010000000039	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P440	4010000000040	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P441	4010000000041	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P442	4010000000042	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P443	4010000000043	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P444	4010000000044	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P445	4010000000045	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P446	4010000000046	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P447	4010000000047	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P448	4010000000048	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	
DA-P449	4010000000049	10 Gbps	10 km	LC Multimode Duplex	19mm	-40 to 75 °C	
DA-P450	4010000000050	10 Gbps	300m	LC Singlemode Duplex	19mm	-40 to 75 °C	