

DIGITUS HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km, with DDM Feature

DN-81003-01
EAN 4016032391562



1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- HP compatible
- HP-Aruba compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex


- Wavelength: Tx 1310nm / Rx 1550nm
- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310/1550 nm
- DDM Support: yes
- Broadcasting Mode: Bidirectional
- Manufacturer compatibility: HP
- Ethernet speed: Fast Ethernet

Package contents

- SFP module
- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	1	0.04	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

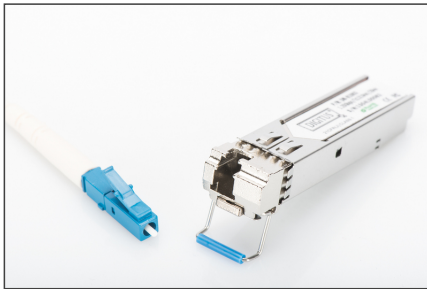

SFP Modules							
Part Number	Part Name	Speed	Distance	Connector	Mounting	Operating Temperature	Additional Notes
DA-PA01	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA02	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA03	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA04	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA05	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA06	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA07	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA08	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA09	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA10	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA11	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA12	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA13	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA14	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA15	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA16	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA17	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA18	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA19	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA20	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA21	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA22	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA23	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA24	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA25	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA26	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA27	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA28	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA29	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA30	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA31	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA32	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA33	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA34	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA35	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA36	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA37	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA38	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA39	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA40	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA41	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA42	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA43	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA44	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA45	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA46	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA47	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA48	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA49	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	
DA-PA50	10 Gigabit Ethernet SFP	10 Gbps	10 km	LC Duplex	19mm	-40 to 85 °C	