

DIGITUS USB Type-C Gen2 adapter / converter cable, Type-C to HDMI A

AK-300330-020-S
EAN 4016032451334



USB Type-C adapter cable, Type-C to HDMI A M/M, 2.0m, 4K/60Hz, 18GB, bl, gold

The USB Type-C 4K HDMI adapter / converter cable allows a direct connection of TV, monitor or projector to a USB-C device. The adapter / converter is a must-have accessory, whether you connect your Notebook privately to a TV or professionally for presentations via an HDMI projector.

Connect your USB-C device directly to a monitor, TV or beamer - No need of an additional adapter.

- Your USB-C equipped device must support video (DP alt mode) to work with this adapter / converter cable.
- Video output capability depends on the graphics card of your notebook and the connected monitor. Some screens also limit the available resolution.

- Support up to 4K/2K with 60Hz
- Supports digital transfer of audio signals, stereo
- Data transfer rate up to 18 Gbit/s



Attributes

- AWG: 26
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: HDMI type A, plug
- Connector surface: nickel-plated
- Ferrite filter: 2 x ferrite beads
- USB compliance: USB 2.0
- Length: 2 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	40	5.80	35.00	26.00	24.00	21,840.00
Packaging Unit Inside	10	1.45	28.00	11.00	21.00	6,468.00
Packaging Unit Single	1	0.15	17.00	3.00	12.00	612.00
Net single without Packaging	1	0.10	15.00	3.00	14.00	0.00

More images:



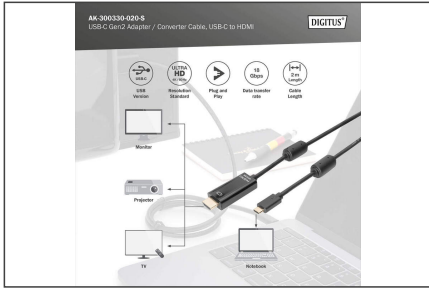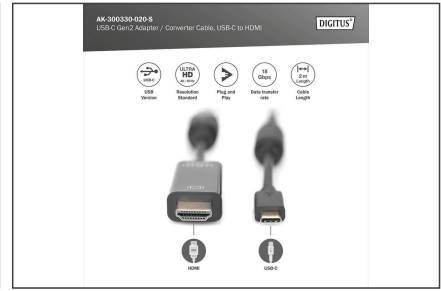

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com