

DIGITUS 1.25 Gbps copper SFP-module, RJ45

DN-81005-01
 EAN 4016032454915



**1.25 Gbps Copper SFP Module, RJ45, HP-compatible
 10/100/1000Base-T, up to 100m, HP**

The DIGITUS® Mini GBIC (SFP) transceiver modules offer the highest quality and reliability. The module offers a perfect opportunity for you to extend your Gigabit network switch with a free SFP Uplink Port around an additional RJ45 connection. Thanks to the hot-plug capability, you can install the module without any interruption to the network traffic or restart of the device. In addition, conformity with the MSA (Multi Source Agreement) standard provides compatibility with the current network switch manufacturers.

The plug and play extension for your network switch

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE
- Up to 1.25 Gbps bidirectional maximum data rate


- Compliant to IEEE 802.3z Gigabit Standard
- High quality and excellent reliability
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable - installation possible while in operation
- Auto MDI/MDI-X
- Connection: 1x RJ45, CAT 5
- Distance: up to 100 m
- Operating temperature: 0 °C ~ 70 °C
- Mode: Copper
- Connector: RJ45
- Distance (km): 0.1
- DDM Support: no
- Manufacturer compatibility: HP, Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.00	25.40	39.40	55.00	55,041.80
Packaging Unit Inside	30	1.75	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.06	3.20	9.30	12.00	357.12
Net single without Packaging	1	0.20	1.50	1.50	7.00	0.00

More images:

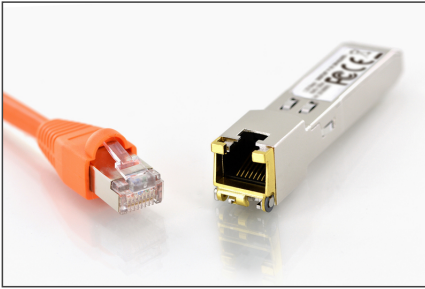

SFP Modules							
Product Number	MM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Fast Ethernet							
DM-8101	42780200400	100 Mbps	2 km	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8102	42780200700	100 Mbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8104	42780200700	100 Mbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
10G Ethernet							
DM-8105	42780200400	10 Gbps	2 km	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-8106	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8107	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8108	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8109	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
10G Ethernet SFP+							
DM-8110	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8111	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8112	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8113	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8114	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8115	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8116	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8117	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8118	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-8119	42780200700	10 Gbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓