

DIGITUS 4-Port Universal USB Charging Adapter, USB-C™ / USB A, 100 W, GaN

DA-10197

EAN 4016032474043



USB-C Wall Charger, white 100W, 2x USB-C, 2x USB-A, PD 3.0

The 4-Port USB Charging Adapter by DIGITUS® is a powerful charging solution for everyday use with the latest GaN technology, offering you efficient and faster charging with low heat generation in a small size. With the Universal Charging Adapter, two USB-C™ devices and two USB A devices can be charged simultaneously. Compatibility with Power Delivery 3.0 (PD) enables rapid charging with up to 100 W for both USB-C™ ports and 30 W for both USB A ports. In combined operation, an output of 65 W is available for USB-C™ devices and 30 W in total for USB A devices. Charge tablets, smartphones, mobile gaming consoles and even notebooks with the highest possible output. The integrated security features such as short circuit, surge and excess heat protection ensure the safety of your devices.

Universal charging adapter for USB-C™ and USB A devices with a maximum total output of 100 W (PD 3.0)

- Number of USB-C™ ports: 2
- Number of USB A ports: 2
- Output of USB-C™ ports: 100 W max. for both ports in total

- Power output USB A ports: 30 W max. for both ports in total
- When using USB-C™ and USB A ports simultaneously: USB-C™ 65 W max. in total / USB A 30 W max. in total
- Supported output voltages in volts: 5 / 9 / 12 / 15 / 20
- Input voltage: 100 - 240 V AC, 50/60 Hz, 2 A
- Mains plug: CEE-7/16 Euro plug (Type C)
- Dimensions: L 75 x W 75 x H 28.7 mm
- Weight: 200 g
- Color: White

Attributes



- Style: Charger/Power supply
- Type: Notebook
- USB-C Products: yes

Package contents

- 1 x 4-Port Universal USB Charging Adapter, USB-C™ / USB A, 100 W
- 1 x QIG
- 1 x USB cable (Type C), 1m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	8.00	40.00	35.00	45.00	63,000.00
Packaging Unit Inside	1	0.20	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.20	12.50	4.50	15.00	843.75
Net single without Packaging	1	0.20	3.00	7.00	7.30	0.00

A top-down view of a desk setup. A laptop is partially visible at the top left. A smartphone is connected to a white square power adapter via a white cable. Another white cable connects the adapter to a white multi-port USB charger. The charger is plugged into a power outlet. A green fern plant is in the bottom right corner.

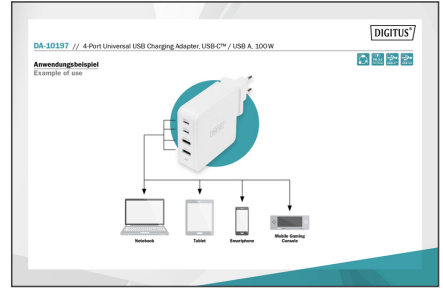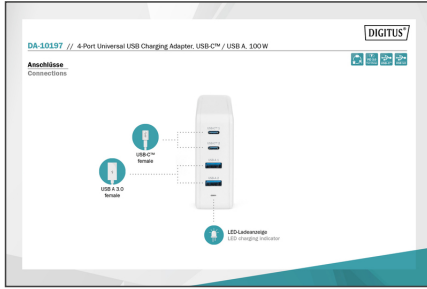

- Use charging adapters or power supply units in accordance with the instructions in the operating instructions to ensure optimum performance.
- Connect the charging adapter to an easily accessible socket in the voltage range between 100-240 V AC.
- Disconnect the charging adapter from the socket after use.
- Do not use the charging adapter with electronic devices that are outside the specifications of the charging adapter.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

EU based economic operator ensuring the product complies with the required regulations.

www.digitus.info Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.