


# DIGITUS CAT 8.2 S/FTP installation cable, 500 m, Simplex, Dca-s2,d1,a1

DK-1843-VH-5  
EAN 4016032380542

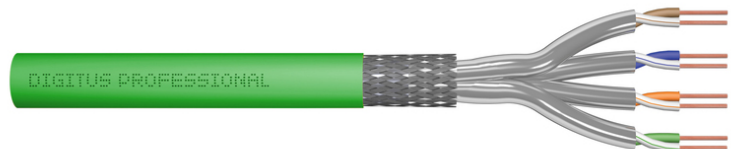

**CAT 8.2 S-FTP install. cable, 2000 MHz, AWG 22/1 Dca, 500 m, drum, simplex, grün**

The Digitus Cat 8.2 S/FTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-12-1, DIN EN 50173, IEC 60332-3-24. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

**Future-oriented standards and high-end quality for your network**

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 22/1
- System/s of AVCP: AVCP 3
- Insulation: SFS-PE (foamed polyethylene sheath)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-covered polyester film, 100% coverage
- Overall shielding: Tinned copper wire braid
- Outer sheath: Dca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.55 mm nominal
- Outer sheath color: Green
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C
- Operating temperature range: -20 °C bis +60 °C






- Installation temperature range: 0 °C to +50 °C
- Overall diameter Simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15 Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): Is not specified
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.4Ohm/30m max. (4% max. resistance unbalance)
- DC loop resistance: 5.6 Ohm/24m max. (3% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Signal propagation delay: 171 nS/30 m max.
- Propagation delay: 13,5 nS/130 m max.
- Separating class: „d“ acc. to EN 50174-2
- NVP: 79%
- Assortiment: Getwist paar Installatiekabels
- Categorie: CAT 8.2
- Categorie: CAT 8.2
- Afscherming: S-FTP, paren in metaalfolie- en vlechtscherming
- CPR: Dca
- Lengte: 500 m
- Kleur: groen
- Mantel: LSOH
- Structuur: 4 x 2 AWG 22/1, massief getwist paar

**Package contents**

- CAT 8.2 S/FTP installation cable on drum, 500 m, Simplex, Dca

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Inside	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Single	1	30.00	34.00	39.50	39.50	53,048.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

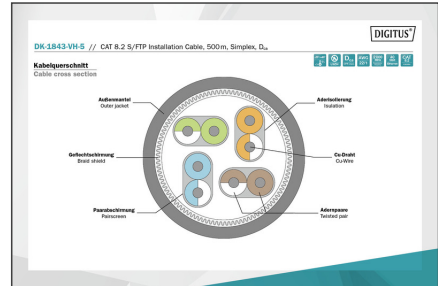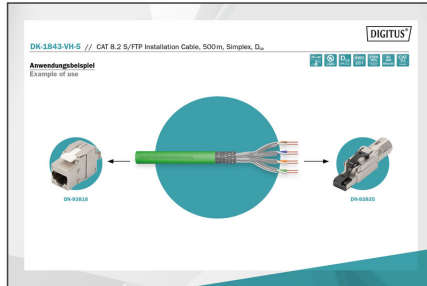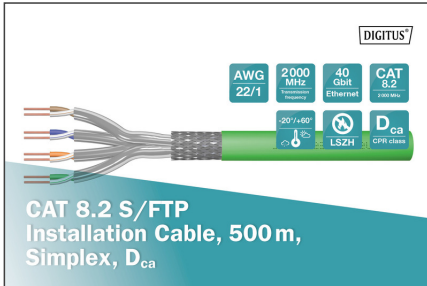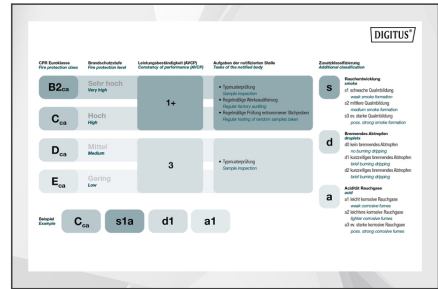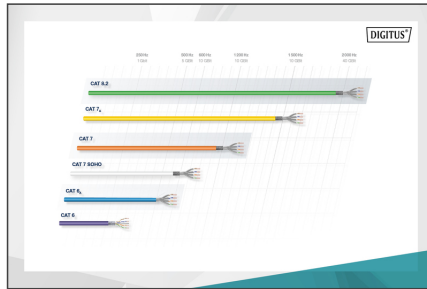

Produktinformationen Product Information		Physikalische Spezifikationen Physical Properties	
Produktname	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktcode	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktbeschreibung	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produkttyp	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktfamilie	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktserie	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktversion	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktstatus	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produkttyp	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktfamilie	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktserie	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktversion	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca
Produktstatus	DK-1843-VH-S // CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca	Material	28 AWG CAT 8.2 S/FTP Installation Cable, 500m, Simplex, Dca

Leistungsmerkmale Transmission Properties						
AWG	AWG	AWG	AWG	AWG	AWG	AWG
28	28	28	28	28	28	28
1	1	1	1	1	1	1
2	2	2	2	2	2	2
3	3	3	3	3	3	3
4	4	4	4	4	4	4
5	5	5	5	5	5	5
6	6	6	6	6	6	6
7	7	7	7	7	7	7
8	8	8	8	8	8	8
9	9	9	9	9	9	9
10	10	10	10	10	10	10
11	11	11	11	11	11	11
12	12	12	12	12	12	12
13	13	13	13	13	13	13
14	14	14	14	14	14	14
15	15	15	15	15	15	15
16	16	16	16	16	16	16
17	17	17	17	17	17	17
18	18	18	18	18	18	18
19	19	19	19	19	19	19
20	20	20	20	20	20	20
21	21	21	21	21	21	21
22	22	22	22	22	22	22
23	23	23	23	23	23	23
24	24	24	24	24	24	24
25	25	25	25	25	25	25
26	26	26	26	26	26	26
27	27	27	27	27	27	27
28	28	28	28	28	28	28
29	29	29	29	29	29	29
30	30	30	30	30	30	30
31	31	31	31	31	31	31
32	32	32	32	32	32	32
33	33	33	33	33	33	33
34	34	34	34	34	34	34
35	35	35	35	35	35	35
36	36	36	36	36	36	36
37	37	37	37	37	37	37
38	38	38	38	38	38	38
39	39	39	39	39	39	39
40	40	40	40	40	40	40
41	41	41	41	41	41	41
42	42	42	42	42	42	42
43	43	43	43	43	43	43
44	44	44	44	44	44	44
45	45	45	45	45	45	45
46	46	46	46	46	46	46
47	47	47	47	47	47	47
48	48	48	48	48	48	48
49	49	49	49	49	49	49
50	50	50	50	50	50	50

