

DIGITUS HP-compatibele Mini GBIC-module (SFP), 1,25 Gbps, 20 km, met DDM-functie

DN-81003-01
EAN 4016032391562



1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

De DIGITUS® Mini GBIC (SFP) zendontvanger module biedt de hoogste kwaliteit en betrouwbaarheid. Of het nu gaat van switch naar switch, van converter naar switch, van converter naar converter of van andere, uitgebreide toepassingen: De grote verscheidenheid aan DIGITUS®-modules stelt u in staat om flexibel gebruik te maken van de glasvezeltechnologie. Dankzij de conformiteit met de MSA-norm (Multi Source Agreement) is een compatibiliteit met externe fabrikanten gegarandeerd.

De plug-and-play glasvezelaansluiting

- HP-compatibel
- HP-Aruba-compatibel
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Ondersteunt DDM (Digital Diagnostic Monitoring)
- Bidirectionele WDM-module - Alleen één vezel nodig
- Hoge kwaliteit en de beste bescherming tegen uitvallen
- 1,25 Gbps maximale gegevenssnelheid
- Voldoet aan de IEEE 802.3z Gigabit standaard
- Klasse 1 laserproduct volgens EN 60825-1
- Eenvoudige Plug and Play-installatie


- Compatibel met MSA (Multi Source Agreement)
- Hot pluggable
- Aansluiting: 1x LC Simplex
- Golflengte: Tx 1310 nm/Rx 1550nm
- Zendervermogen: Minimum -5 dBm, Maximum 0 dBm
- Gevoeligheid ontvangstvermogen: Minimum -24 dBm
- Voor een afstand van maximaal 20 km
- Geschikt voor 09/125µm Singlemode-glasvezelkabel
- Veilig snelvergrendelingsmechanisme
- 3,3 V voeding
- Bedrijfstemperatuur: 0°C~70°C
- Modus: Enkele modus
- Connector: LC
- Distance Unit: 20
- Golflengte: 1310/1550 nm
- DDM ondersteuning: yes
- Broadcasting Mode: Bidirectioneel
- Compatibiliteit met fabrikant: HP
- Ethernetsnelheid: Fast Ethernet

Package contents

- SFP-module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	1	0.04	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

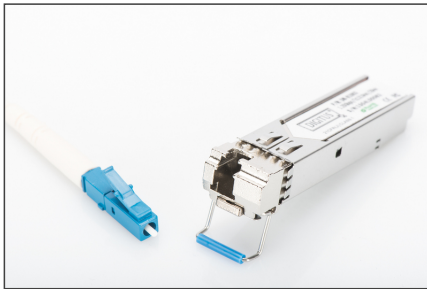

SFP Modules							
Part Number	Speed	Form Factor	Distance	Connector	Standard	Operating Temperature	Industrial Version
DA-1000	10 Gbps	Form Factor	10 km	LC Multimode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
SFP+							
DA-1000	10 Gbps	Form Factor	10 km	LC Multimode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
10G							
DA-1000	10 Gbps	Form Factor	10 km	LC Multimode Duplex	10GBase-ER4	-40 to 85 °C	
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	
Form Factor							
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓
DA-1000	10 Gbps	Form Factor	10 km	LC Singlemode Duplex	10GBase-ER4	-40 to 85 °C	✓