


DIGITUS Cat.7 S/FTP installation cable, 1000 m, simplex, Cca

DK-1744-VH-10
EAN 4016032441281

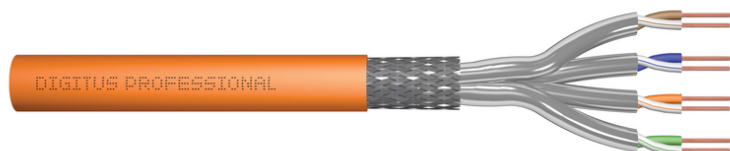

CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 1000 m drum, simplex, or

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 60332-3-24, EN 50575. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper braid
- Outer sheath: Cca-s1a d1 a1.acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,50 mm (Eca); 0,52 mm (Dca); 0,60 mm (Cca); 0,60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C

- Operating temperature range: -20 °C up to +50 °C
- Installation temperature range: 0 °C up to +50 °C
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. resistance unbalance)
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-3-24 (LSOH-PVC)
- Assortiment: Getwist paar Installatiekabels
- Categorie: CAT 7
- Afscherming: S-FTP, paren in metaalfolie- en vlechtscherming
- Afscherming: S-FTP, paren in metaalfolie- en vlechtscherming
- CPR: Cca
- Lengte: 1000 m
- Kleur: oranje
- Mantel: LSOH
- Structuur: 4 x 2 AWG 23/1, massief getwist paar

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	53.38	54.70	54.70	36.50	109,211.00
Packaging Unit Inside	1	53.38	54.70	54.70	36.50	109,211.00
Packaging Unit Single	1	53.38	54.70	54.70	36.50	109,211.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

Leistungsmerkmale: Transmission Properties

FWL	JET	MEET	PR-NEST	AJCS	FKLCS	IKL	ELRST	PKLST
1.1	2.1	3.1	4.1	5.1	6.1	7.1	8.1	9.1
10	11	12	13	14	15	16	17	18
19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99
100	101	102	103	104	105	106	107	108

Produktinformation Product Information

Elektrische Eigenschaften Electrical Properties

Physikalische Spezifikationen Physical Properties

Mechanische Eigenschaften Mechanical Properties

DK-1744-VHS // CAT 7 S/FTP Installation Cable, 500m, Simplex, D_{ca}

Kabelquerschnitt

DK-1744-VH-10 // CAT 7 S/FTP Installation Cable, 1000m, Simplex, C_{ca}

Anwendungsbeispiel

CAT 7 S/FTP Installation Cable, 1000 m, Simplex, C_{ca}

AWG 23/1, 1200 MHz, 10 Gbit Ethernet, CAT 7, 20°/1+50°, LSZH, C_{ca} CPR class

