


# DIGITUS 25G DAC Cable SFP28 4m

DN-81244  
EAN 4016032478829

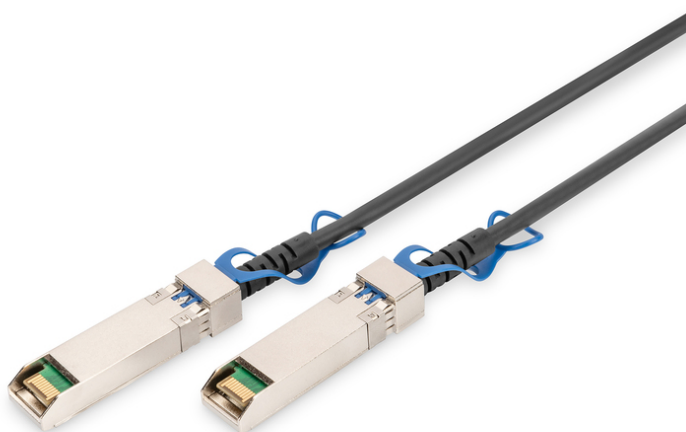

## DAC Cable SFP28 4 MDAC Cable 25 G 4m

DIGITUS® 25G SFP28 Passive Direct-Attach Copper Twinax Cable are a high-performance, energy-saving, short-range connectivity solution 25G Etherne application, switches, high peroframnce computer, dtat sotrage arrays and telecom system. It consists of a shielded twinax copper cable with pluggable connectors on either end. Passive DAC cable have no electrical components built into the cable assembly and recommend for short transmission distance. Typically 1~2m and max. 5m lengths.

**It is suitable for short reach connection between two SFP28 ports in 25G interconnecting networking applications.**

- Number of Lanes : Tx & Rx
- Connector Type: SFP28 to SFP28

- Channel Data Rate: 25.88243 Gbps
- Operating Temperature: 0 to +70°C
- Otorage Temperature: -40 to +85°C
- Supply Voltage: 3.3V nominal
- Power consumption less than 0.5W
- Compliant with MSA SFP28
- Electrical Interface: 20 pins edge connector
- Management Interface: Serial, I<sup>2</sup>C
- Connector is compatible with SFF-8432 specification
- Compatible with Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL
- Wsparcie DDM: nie

## Logistyka

	Liczba (sztuki)	Waga (kg)	Głębokość (cm)	Szerokość (cm)	Wysokość (cm)	cm <sup>3</sup>
Zewnętrzne opakowanie zbiorcze	90	15.00	48.00	48.00	38.00	87,552.00
Opakowanie wewnętrzne	1	0.17	0.00	0.00	0.00	0.00
Opakowanie jednostkowe	1	0.17	26.00	26.00	4.00	2,704.00
Netto bez opakowania	1	0.21	5.80	1.40	1.10	0.00

## Więcej zdjęć

