


# DIGITUS Cat.5e SF/UTP installation cable, 305 m, simplex, Eca

DK-1531-V-305  
EAN 4016032241164

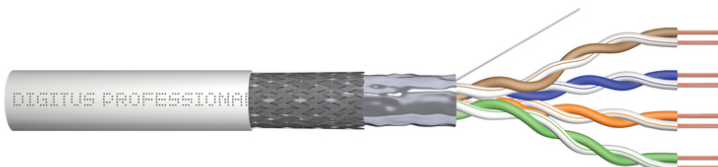

**CAT 5e SF-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 305 m paper box, simplex, gr**

Adequado para instalações de linhas de cabo classe D, 100MHz

**Melhor desempenho e melhor qualidade de ligação com a rede.**



- Isolamento: PE
- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento exterior: PVC
- Cor: Cinzento (RAL 7035)


### Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 5e
- Shielding: SF-UTP, foil and braid shielding
- CPR: Eca
- Length: 305 m
- Color: grey
- Jacket: PVC
- Structure: 4 x 2 AWG 24/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	15.85	46.00	45.50	24.50	51,278.50
Packaging Unit Inside	1	15.85	22.00	43.00	44.00	41,624.00
Packaging Unit Single	1	15.85	22.00	43.00	44.00	41,624.00
Net single without Packaging	1	14.50	42.00	42.00	29.00	4,536.00

### More images:

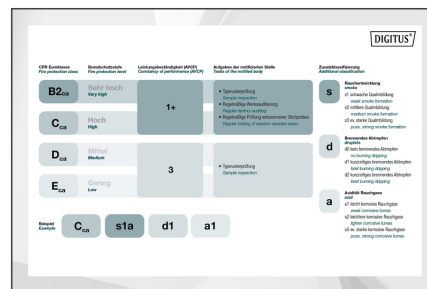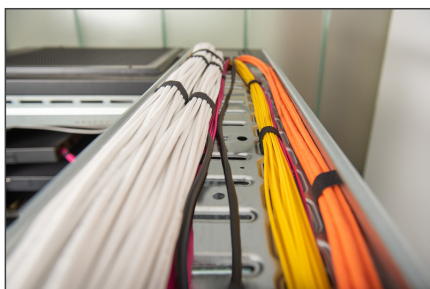


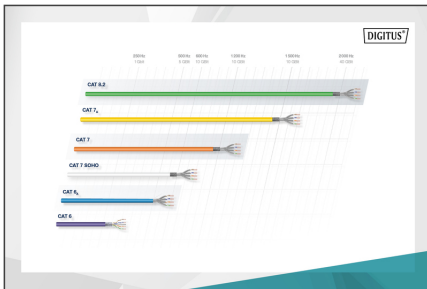


**Leistungsmerkmale Transmission Properties**

FREQ.	ATT	NEXT	PS NEXT	ACR	PS ACR	RL	ELFEXT	PRELFTD
MHz	dB	dB	dB	dB	dB	dB	dB	dB
10	1.2	18.0	35.8	20.2	47.0	11	40.2	17.0
20	3	17.8	35.4	20.0	45.8	10.9	39.2	16.8
100	10.0	15.8	34.2	19.0	39.8	10.6	35.0	15.8
1000	21.0	13.8	32.8	18.0	34.8	10.3	30.8	14.8
10000	38.0	11.8	31.4	17.0	30.4	10.0	26.6	13.8
100000	50.0	10.0	30.2	16.0	26.0	9.7	22.4	12.8

Standardabweichung: ±10% (gemäß IEC 60754-2) (gemäß IEC 60754-1)

Technische Daten / Technical Data		Physikalische Eigenschaften / Physical Properties	
<b>Bezeichnung / Name:</b> DK 1531-V-305	DK 1531-V-305	<b>Lineartyp / Line type:</b> UTP	<b>Bezeichnung / Name:</b> DK 1531-V-305
<b>Hersteller / Manufacturer:</b> ASSMANN Electronic GmbH	ASSMANN Electronic GmbH	<b>Leitung / Conductor:</b> 4 x 26 AWG	<b>Material / Material:</b> PVC
<b>Teilenummer / Part No.:</b> DK 1531-V-305	DK 1531-V-305	<b>Leitungsdurchmesser / Conductor diameter:</b> 0.25 mm	<b>Leitungsdurchmesser / Conductor diameter:</b> 0.25 mm
<b>Produkttyp / Product type:</b> SF/UTP	SF/UTP	<b>Leitungsisolierung / Conductor insulation:</b> PVC	<b>Leitungsisolierung / Conductor insulation:</b> PVC
<b>Leitungsisolierung / Conductor insulation:</b> PVC	PVC	<b>Leitungsisolierung / Conductor insulation:</b> PVC	<b>Leitungsisolierung / Conductor insulation:</b> PVC
<b>Leitungsisolierung / Conductor insulation:</b> PVC	PVC	<b>Leitungsisolierung / Conductor insulation:</b> PVC	<b>Leitungsisolierung / Conductor insulation:</b> PVC

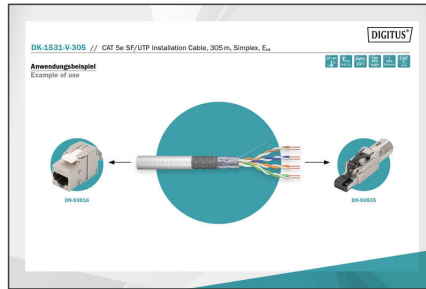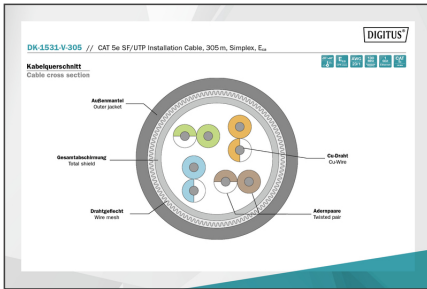

**CAT 5e SF/UTP Installation Cable, 305m, Simplex, E<sub>ca</sub>**

- 100 MHz
- 1 Gbit Ethernet
- AWG 23/1
- CAT 5e
- 100 m
- 20° / +60°
- E<sub>ca</sub> CPE Class

**Safety notes**

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)