


# DIGITUS Double Frame Open Rack, unmounted - 530x870 mm (WxD)

DN-19 42U-D-SW  
EAN 4016032256991

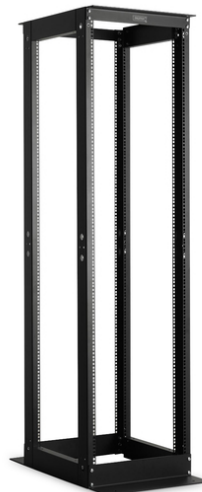

**42U double frame open rack, unmounted 2022x530x870 mm, color black (RAL 9005)**

The unmounted open racks from DIGITUS® Professional offer network- or server application possibilities where there is no need of a closed enclosure due to security, climatized and dust free environments like data centers, laboratories, clean rooms, etc. The open racks are delivered unmounted in a flat-pack which provides a cost effective and economical solution. While being able to install quick and easy it consists of strong material for maximum performance.

**Modular and sturdy structure made for high demand IT infrastructure solutions - designed and developed on highest standards.**

- 2.0 mm strong steel material on frame system
- 4.0 mm strong steel material on top and bottom L-support connection pieces
- Modular structure which allows universal mounting options on each profile
- incl. adjustable feet group
- Delivery in unmounted flat-pack

- Load capacity: 600 kg
- Size of top- and base chassis: 530 x 410 mm (W x D)
- Max. equipment mounting depth: 570 mm
- Depth of complete base chassis incl. supporting L-shape parts: 870 mm

**Attributes**

- Cabinet type: Open rack, unmounted
- Color: black, RAL 9005
- Depth: 870 mm
- Front door: without
- Load capacity: 600 kg
- Rear door: without
- Side panels: Without
- Units: 42
- Width: 530 mm
- IP protection class: without
- Mounted: no

**Package contents**

- Material de fixação

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	45.60	203.00	54.50	11.00	121,698.00
Packaging Unit Inside	1	45.60	203.00	54.50	11.00	121,698.00
Packaging Unit Single	1	45.60	203.00	11.00	54.50	121,698.00
Net single without Packaging	1	41.00	87.00	53.00	202.20	576,000.00

**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.

- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)