

DIGITUS DVI extender over Cat.5 / Cat.6

DS-54101

EAN 4016032285694



DVI Video Extender over Cat5 up to 70m (CAT5, UTP), max. res. 1920X1200@60Hz

The DVI Cat.5 / Cat.6 extender extends your PC DVI transmission distance up to 70 meters through a simple Cat5 cable. The possible resolutions depend on the extended distance.

Extension of DVI signal up to 70 meter

- Não necessita de alimentação externa


Attributes

- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 50 m
- KVM: no
- PoE (Power over Ethernet): no
- Transmission technology: CAT

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	10.80	33.50	37.00	27.50	34,086.20
Packaging Unit Inside	1	0.11	4.90	8.60	6.30	265.48
Packaging Unit Single	1	0.11	5.00	8.50	6.00	255.00
Net single without Packaging	1	0.03	5.60	4.00	2.30	187.50

More images:

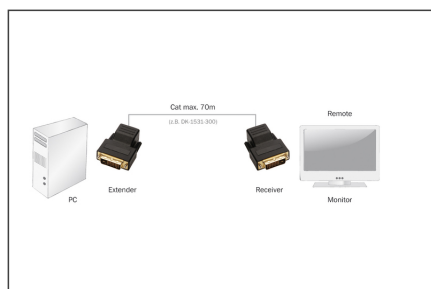

VIDEO VERLÄNGERUNGEN VIDEO EXTENSIONS	
HDMI	M=Meter / meters
DS-54001 (up to 1080p)	10 M
DS-54001	10 M
DS-54100	10 M
DS-54400 (up to 1080p)	10 M
DS-54500 (up to 1080p)	10 M
DS-54100	10 M
VGA	
DS-54001	10 M
DS-54000 (up to 1080p)	10 M
DS-54400	10 M
DS-54400 (up to 1080p)	10 M
DS-54402 (up to 1080p)	10 M
DS-54402 (up to 1080p)	10 M
DVI	
DS-54001	10 M
DS-54101	10 M

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and

Ethernet connections are connected correctly.

- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com