

DIGITUS Cabo de ligação DisplayPort

AK-340100-010-S
EAN 4016032288916



DisplayPort connection cable, DP M/M, 1.0m, w/interlock, Ultra HD 4K, bl

Este cabo HD áudio/vídeo digital de elevado desempenho serve para a ligação de computadores ou computadores portáteis a monitores com interface DisplayPort.

Ideal para CAD/CAM, GIS, desenvolvimento 3D, simulação em tempo real e mais.


- Suporta até 4K/2K com 60Hz
- Suporta formatos de vídeo: 4K/2K@24 Hz, 4K/2K @30 ou 4K/2K 60 Hz
- Suporta resolução vídeo: 4K (3840x2160)@60Hz, Full HD (1920x1080)@120Hz

Attributes

- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CCS
- Length: 1 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 100 | 8.00 | 50.00 | 33.00 | 22.00 | 36,300.00 |
| Packaging Unit Inside | 10 | 0.80 | 2.00 | 14.00 | 22.00 | 616.00 |
| Packaging Unit Single | 1 | 0.08 | 22.00 | 14.00 | 2.50 | 770.00 |
| Net single without Packaging | 1 | 0.06 | 14.00 | 12.50 | 2.00 | 0.00 |

More images:

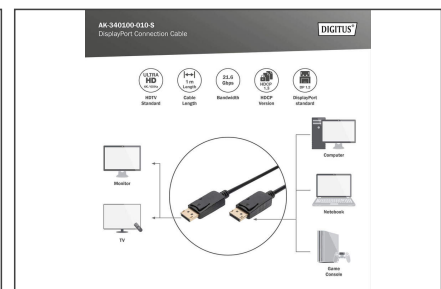

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com