

DIGITUS Mini DisplayPort Adapter - DisplayPort, HDMI + DVI

AK-340509-002-W
EAN 4016032292555



DisplayPort splitter cable, miniDP - DP+HDMI+DVI M/F, 0.2m, DP 1.1a compatible, CE, wh

Este cabo 3 em 1 é adequado para ligar um MacBook, MacBook Air, MacBook Pro, iMac, Mac mini e Mac Pro a um Projector, Monitor LCD/TF/LED ou TV Plasma com por exemplo DP, HDMI tipo A ou interface DVI. Não é possível a utilização simultânea de DP, HDMI tipo A ou ligação de dados DVI ! A resolução da imagem depende da ligação usada. A saída DP e HDMI suporta Áudio para iMac (Fim 2009) e MacBook Pro (Meados 2010). Reconhecimento automático do visor.

Não é necessário comprar 3 adaptadores únicos.

- Suporta até 1080p com 60 Hz


Attributes

- Assortment: DisplayPort Cables
- AWG: 32

- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	5.70	40.00	30.20	18.00	21,744.00
Packaging Unit Inside	10	0.57	21.00	24.00	7.00	3,528.00
Packaging Unit Single	1	0.06	20.00	15.00	1.62	486.00
Net single without Packaging	1	0.05	28.70	6.00	1.50	0.00

More images:

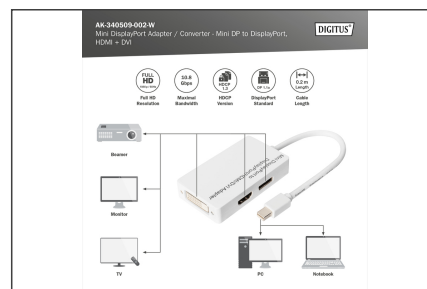

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com