


# DIGITUS Conector SATA

**AK-400114-005-R**  
**EAN 4016032299820**

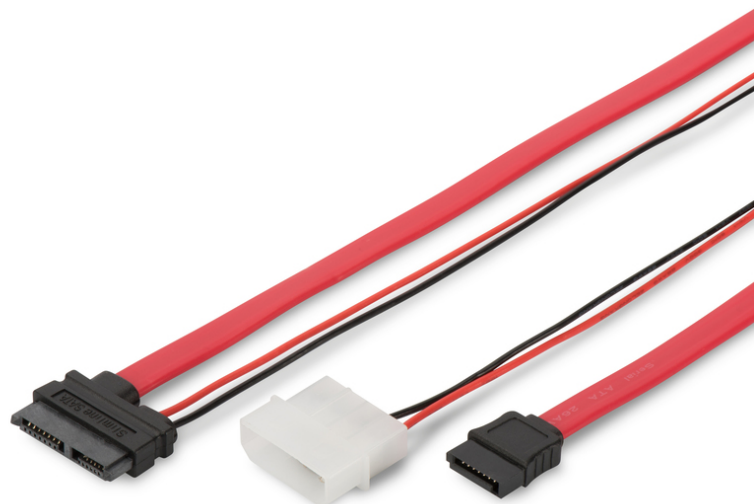

**SATA connection cable, SATA13pin - L-type + power F/F, 0.5m, straight, Slimline, SATA II/III, re**

Este cabo de dados e de alimentação interno é, por exemplo, adequado para a utilização de HTPC (PC-cinema em casa) e liga a entrada SATA da placa principal às unidades integradas Slimline. As unidades podem ser ligadas com um conector padrão SATA, funcionando assim também com qualquer placa principal.

**Não necessita de um cabo de alimentação adicional**

- Compatível com padrão serial ATA
- Taxa de transferência de dados até 300 MB/s
- Cabo de 7 condutores, UL2725
- 4 x linha de dados, 3 x cabo de massa
- Cabo de 2 condutores, UL1007, alimentação de tensão e ligação à terra

**Attributes**

- Assortment: SATA Cables
- AWG: 26
- Color cable: red
- Color connector: black
- Connector 1: SATA (13pin) connector
- Connector 2: SATA (22pin), L-type + 4pin power
- Data rate: 6 Gbit/s
- Hoods: molded
- Interlock: none
- Packaging: Polybag
- Style: Flat cable
- Version: SATA Revision 3
- Wire material: CU
- Length: 0.5 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	300	8.80	46.00	32.00	25.00	36,800.00
Packaging Unit Inside	10	0.29	20.00	15.00	5.00	1,500.00
Packaging Unit Single	1	0.03	21.00	6.00	3.50	441.00
Net single without Packaging	1	0.03	13.50	3.00	3.00	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)