


# DIGITUS Cabo de ligação USB 3.0

AK-300117-005-S  
EAN 4016032325581

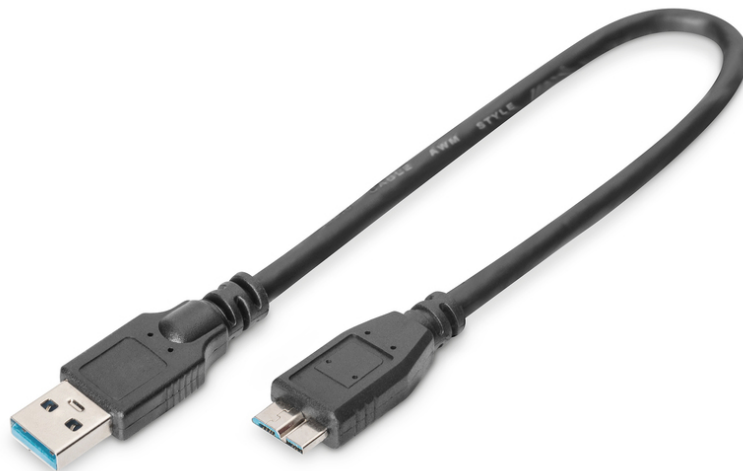

**USB 3.0 connection cable, USB A - Micro USB B M/M, 0.5m, USB 3.0 conform, bl**

USB 3.0 connection cable, USB A - Micro USB B,M/M, 0.5m, USB 3.0 conform, bl

**A blindagem densa permite uma ligação rápida e fiável dos dispositivos externos USB 3.0 com PC, também para longas distâncias.**

#### Attributes



- Assortment: USB Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Micro USB B, plug
- Ferrite filter: none
- Hoods: molded
- Wire material: CU
- Length: 0.5 m
- Shielding: triple shielding

#### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	4.10	38.00	30.20	31.10	35,690.40
Packaging Unit Inside	10	0.41	16.00	22.00	5.00	1,760.00
Packaging Unit Single	1	0.04	12.00	1.50	21.00	378.00
Net single without Packaging	1	0.04	12.00	1.50	21.00	0.00

#### More images:

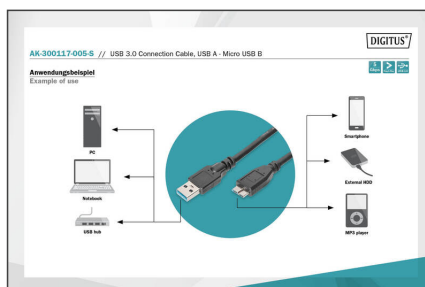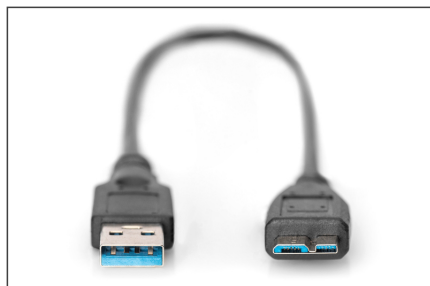

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)