

DIGITUS Cabo adaptador da Porta Monitor, DP/M - HDMI tipo A/F

AK-340408-001-S
EAN 4016032328568



DisplayPort adapter cable, DP - HDMI type A M/F, 0.15m,w/interlock, DP 1.1a compatible, CE, bi

Este cabo HD de vídeo e áudio digital adequa-se, por exemplo, de forma ideal para a ligação de um computador portátil ou computador com interface DP a um monitor HDMI, projetor, monitor LCD/TFT, TV LED ou plasma através de um cabo HDMI.


Contribui para uma carga reduzida da interface.


- Suporta até 1080p com 60 Hz
- Assortment: DisplayPort Cables
- Color cable: black
- Color connector: black

- Connector 1: DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 100 | 7.50 | 50.00 | 32.00 | 22.00 | 35,200.00 |
| Packaging Unit Inside | 1 | 0.08 | 24.00 | 16.00 | 2.00 | 768.00 |
| Packaging Unit Single | 1 | 0.08 | 24.00 | 16.00 | 2.00 | 768.00 |
| Net single without Packaging | 1 | 0.08 | 24.00 | 16.00 | 2.00 | 0.00 |

More images:

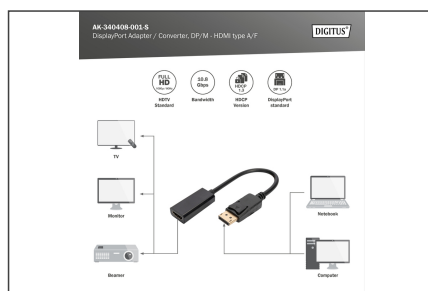

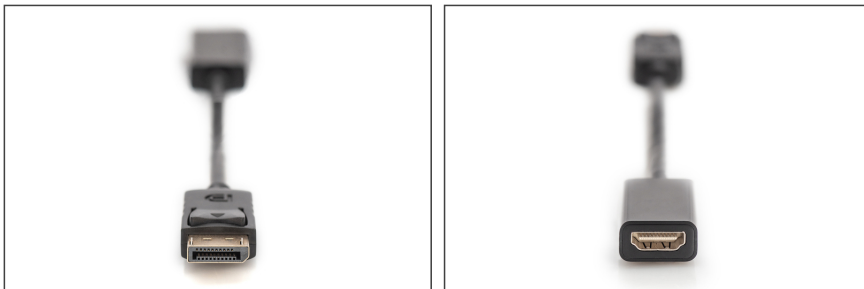**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com