


DIGITUS Cat.6 U/UTP installation cable, 100 m, simplex, Eca

DK-1613-VH-1
EAN 4016032343653

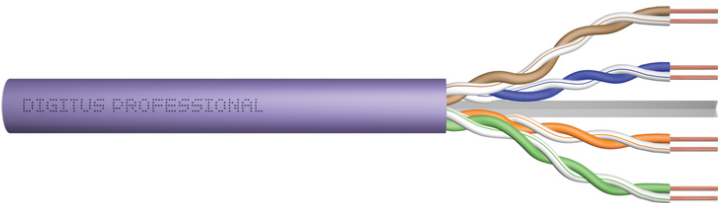

CAT 6 U-UTP installation cable, 250 MHz Eca (EN 50575), AWG 23/1, 100m paper box, sx, pu

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Isolamento: HD-PE
- Número total de condutores isolados: 8, entrançados em 4 pares


- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum



Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 100 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	4.00	31.00	30.50	12.00	11,346.00
Packaging Unit Inside	1	4.00	10.00	28.00	28.00	7,840.00
Packaging Unit Single	1	4.00	10.00	28.00	28.00	7,840.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

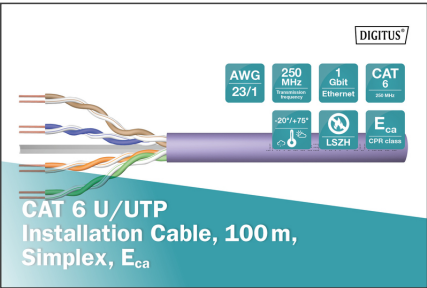

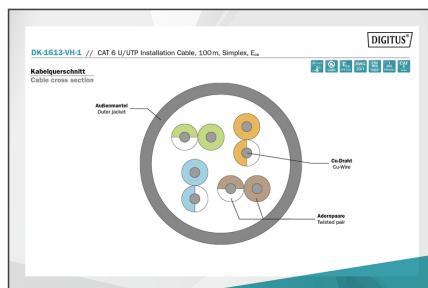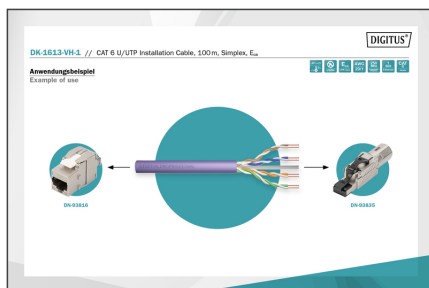

Produktinformation Product Information


Hersteller: Digi-Connect, Deutsche Post, Tele-Service	Code: 000000	Produktions-Spezifikationen Physical Properties
Produkt: DK-1613-VH-1, 100m, Simplex, E _u	Material: PVC	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)
Produkt: DK-1613-VH-1, 100m, Simplex, E _u	Material: PVC	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)
Produkt: DK-1613-VH-1, 100m, Simplex, E _u	Material: PVC	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)

Technische Eigenschaften Technical Properties

Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)
Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)
Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)	Leitungsstruktur: 4x2x0.5mm ² (20 AWG) (20 AWG) (20 AWG) (20 AWG)

Leitungsstruktur Transmission Properties

Parameter	Unit	Value	Unit	Value	Unit	Value	Unit	Value
Attenuation	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5
Attenuation	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5
Attenuation	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5	dB/100m	1.5

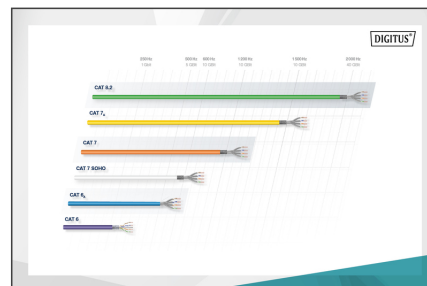

DIGITUS

CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC
CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC
CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC	CEC



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com