


DIGITUS Cabo de instalação par entrançado CAT 6A U-UTP DIGITUS®

DK-1613-A-VH-5
EAN 4016032344209

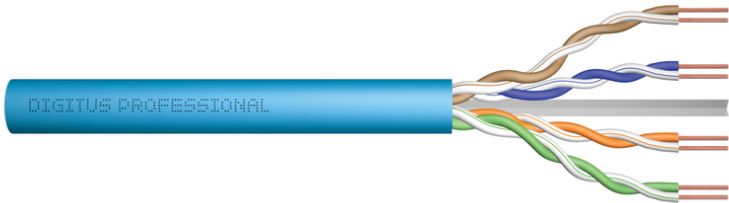

CAT 6A U-UTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 500 m drum, sx, blue

Os cabos de instalação da categoria 6A U-UTP DIGITUS® foram desenvolvidos e testados de acordo com as normas ISO/IEC 11801, TIA/586-C.2 e YD/T1019 categoria 6A. Cada cabo é constituído por 8 condutores com código de cores AWG 23 isolados em polietileno. Os condutores estão entrançados em 4 pares com diferentes comprimentos de colocação. Os detalhes impressos ao longo da cobertura exterior contêm o nome da marca e o número do artigo. O cabo está enrolado numa bobine de madeira que simplifica a instalação.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Isolamento: HD-PE
- Número total de condutores isolados: 8, entrançados em 4 pares



- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum
- Cor: Azul claro




Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 500 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	27.50	50.00	50.00	22.00	55,000.00
Packaging Unit Inside	1	27.50	50.00	50.00	22.00	55,000.00
Packaging Unit Single	1	27.50	50.00	50.00	22.00	55,000.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:

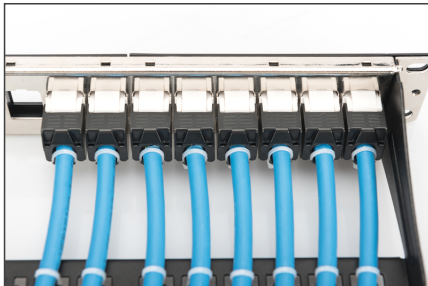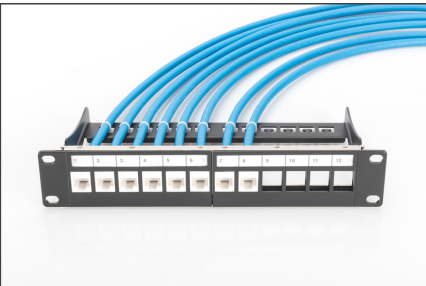

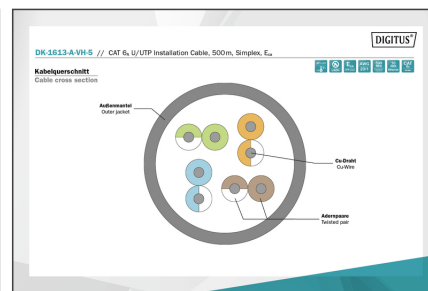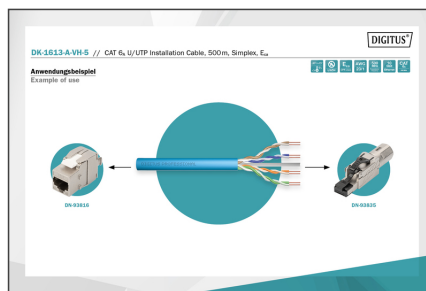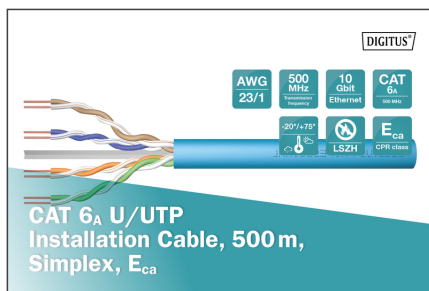

Produktinformation Product Information		Physikalische Spezifikation Physical Properties	
Produkttyp Product type	Professional Network Cable	Material Material	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktcode Product code	DK 1613-A-VH-5	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktbeschreibung Product description	Professional Network Cable, 500m, Simplex, Eca	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produkttyp Product type	Professional Network Cable	Material Material	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktcode Product code	DK 1613-A-VH-5	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktbeschreibung Product description	Professional Network Cable, 500m, Simplex, Eca	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produkttyp Product type	Professional Network Cable	Material Material	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktcode Product code	DK 1613-A-VH-5	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled
Produktbeschreibung Product description	Professional Network Cable, 500m, Simplex, Eca	Material specification	High Quality PVC, 100% Recycled, 100% Recycled, 100% Recycled

Leistungseigenschaften Transmission Properties		Leistungseigenschaften Transmission Properties	
Parameter	Value	Parameter	Value
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m

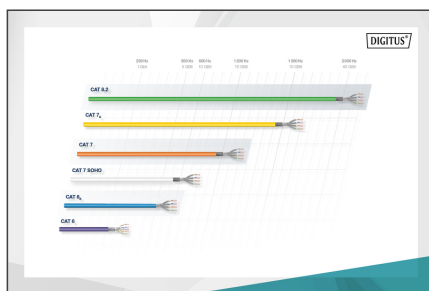

CAT 6A		CAT 6	
Parameter	Value	Parameter	Value
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m
Attenuation	1.5 dB/100m	Attenuation	1.5 dB/100m



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com