

DIGITUS Extensor DIGITUS® VGA-UTP Set

DS-53400
EAN 4016032356721



VGA Extender over UTP, Set max. 1920x1200, signal extended by 300m, 0-70°C

Aumenta um sinal VGA até 300 m, utilizando apenas um simples cabo UTP entre a unidade de transmissão e a unidade de recepção.

Oferece uma distribuição fácil e rápida para sinais vídeo VGA até uma distância de 300 m - coloque os seus ecrãs onde quer que deseje.

- Extensor VGA CAT 5 constituído por uma unidade emissora e uma unidade receptora
- Alta resolução possível até 1920 x 1200 pixéis
- Suporta a extensão de sinais áudio estéreo
- Dimensões (C x L x A): 110 mm x 75 mm x 25 mm
- Peso: 213 g (emissor), 208 g (receptor)
- Temperatura de funcionamento: 0°C~70°C

- Humidade de funcionamento: 10% a 85% (não condensador)
- Ligação à electricidade: 5 V @ 1 A, máx. 5 W

Attributes

- HDTV Resolution max.: 1920 x 1200 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 5e
- Distance: 300 m
- KVM: no
- PoE (Power over Ethernet): no
- Video connection ports: VGA


Package contents

- 1x Extensor VGA-UTP DIGITUS®
- 1x Manual do utilizador

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	15.20	60.00	36.50	25.50	55,845.00
Packaging Unit Inside	1	0.76	27.30	17.50	5.50	2,627.62
Packaging Unit Single	1	0.76	27.30	17.50	5.50	2,627.62
Net single without Packaging	1	0.21	11.00	7.50	2.50	0.00

More images:



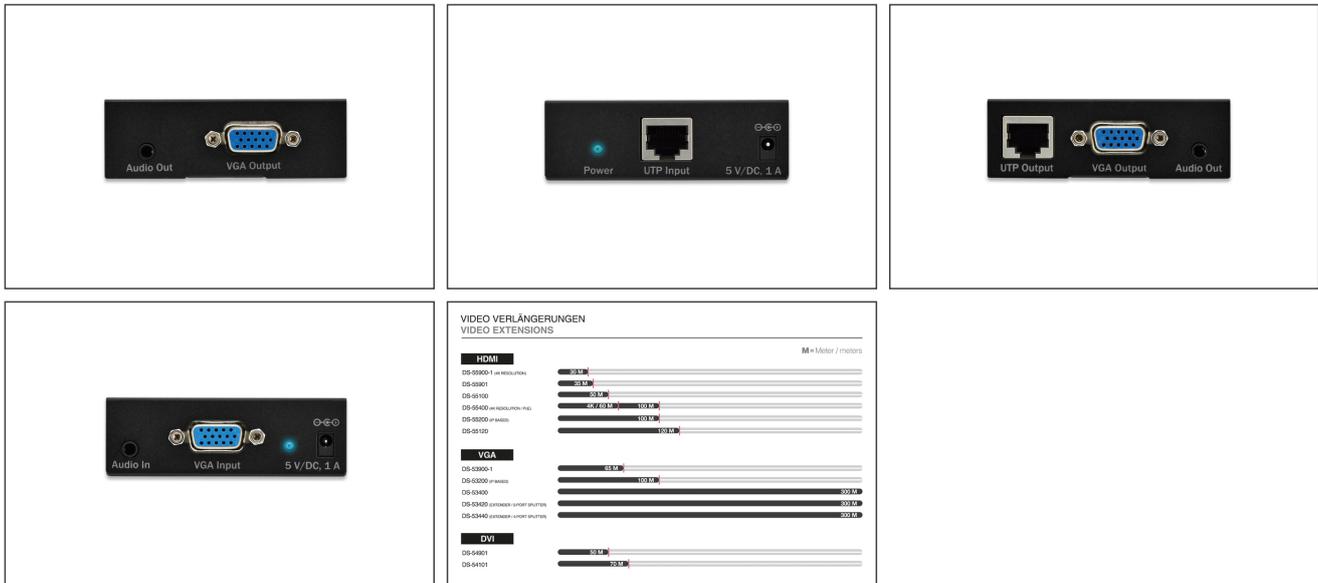

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com