

DIGITUS Extensor Fast Ethernet PoE + com 1 porta de entrada de 10/100Mbps e 2 portas de saída de 10/100Mbps

DN-95122

EAN 4016032365327



Fast Ethernet PoE Extender 1-port PoE in / 2-port PoE out IEEE802.3af/at

O repetidor Fast Ethernet Digitus suporta os cabos de rede e a tecnologia de rede mais recentes, de modo a ampliar o seu sinal Ethernet de 100m até 300 metros. O amplificador é alimentado via PoE (Power over Ethernet) com corrente, não necessitando assim de uma fonte de alimentação suplementar permitindo-lhe utilizar o equipamento onde não existem ligações à corrente ou tomadas, de modo a aumentar o alcance de forma evidente. É uma solução ideal, económica e rápida para a monitorização de segurança e para projetos de rede.

Aumente o seu sinal Ethernet de 100m para 300 metros!

- Ethernet IEEE802.3/802.3u/IEEE802.3 af/at
- Velocidade Ethernet: Fast Ethernet 10/100Mbps
- Alcance de transferência até 300 m
- PoE - Alimentação via Ethernet

- Não necessita de uma fonte de alimentação adicional
- Temperatura de funcionamento: -40 °C a 75 °C
- Dimensões (C x L x A): 103 x 82 x 25 mm
- Peso: 195 g

Attributes

- Industrial usage: no
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vandalism: no
- VLAN: no


Package contents


- Extensor Fast Ethernet PoE
- Manual de instruções
- Ângulo de montagem

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	16.00	40.00	66.00	36.00	95,040.00
Packaging Unit Inside	1	0.40	12.20	16.70	7.40	1,507.68
Packaging Unit Single	1	0.40	12.20	16.70	7.40	1,507.68
Net single without Packaging	1	0.20	8.20	10.30	2.50	0.00

More images:

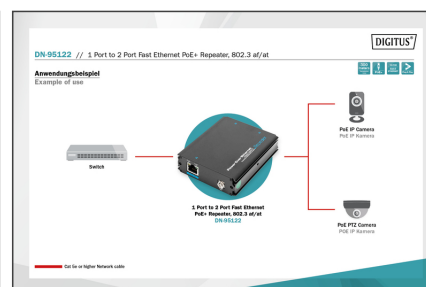

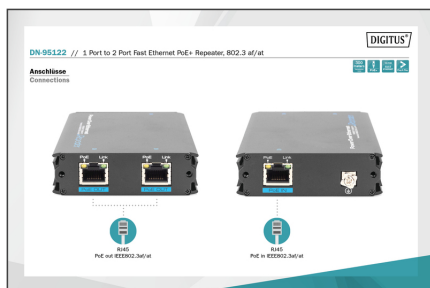

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com