

DIGITUS Módulo compatível HP mini GBIC (SFP), 1,25 Gbps, 20 km, com função DDM

DN-81003-01
EAN 4016032391562



1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

O módulo transceptor DIGITUS® Mini GBIC (SFP) proporciona alta qualidade e fiabilidade. Quer seja a partir de interruptor para interruptor, conversor para interruptor, conversor para conversor ou qualquer outra aplicação: a vasta gama de módulos DIGITUS® permite a utilização flexível da tecnologia de fibra ótica. A conformidade com a norma MSA (Multi Source Agreement) garante a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica Plug and Play

- Compatível com HP
- Compatível com HP-Aruba
- Módulo Mini GBIC SFP (Small Form Factor Pluggable)
- Suporta DDM (Digital Diagnostic Monitoring)
- Módulo bidirecional WDM - apenas é necessária uma fibra
- Alta qualidade e excelente proteção contra falhas
- Velocidade de dados máxima de 1,25 Gbps
- Está em conformidade com a norma IEEE 802.3z Gigabit
- Produto laser de classe 1 em conformidade com a EN 60825-1
- Instalação Plug and Play simples
- Compatível com a norma MSA (Multi Source Agreement)


- Hot pluggable
- Ligação: 1x LC Simplex
- Comprimento de onda: Tx 1310 nm / Rx 1550 nm
- Potência de transmissão: Mínima -5 dBm, máxima 0 dBm
- Sensibilidade de receção: mínima -24 dBm
- Para uma distância até 20 km
- Adequado para cabo de fibra ótica 09/125 µm, modo simples
- Mecanismo de bloqueio seguro e rápido
- Fonte de alimentação 3,3 V
- Temperatura de funcionamento: 0°C~70°C
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310/1550 nm
- DDM Support: yes
- Broadcasting Mode: Biidirectional
- Manufacturer compatibility: HP
- Ethernet speed: Fast Ethernet

Package contents

- Módulo SFP

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 240 | 8.50 | 50.00 | 29.00 | 54.50 | 79,025.00 |
| Packaging Unit Inside | 1 | 0.04 | 7.00 | 20.00 | 30.00 | 4,200.00 |
| Packaging Unit Single | 1 | 0.04 | 3.00 | 11.50 | 9.00 | 310.50 |
| Net single without Packaging | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

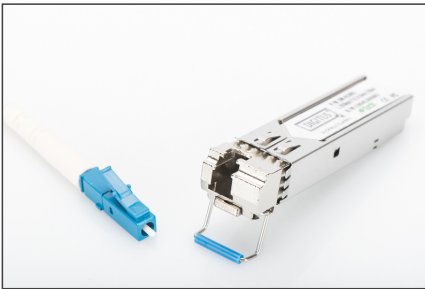

| SFP Modules | | | | | | |
|-------------|---------|----------|---------------------|----------|-----------------------|------------------|
| Part Number | Speed | Distance | Connector | Mounting | Operating Temperature | Additional Notes |
| DhK140 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK142 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK143 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK144 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK145 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK146 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK147 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK148 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK149 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK150 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK151 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK152 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK153 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK154 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK155 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK156 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK157 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK158 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK159 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK160 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK161 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK162 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK163 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK164 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK165 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK166 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK167 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK168 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK169 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK170 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK171 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK172 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK173 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK174 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK175 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK176 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK177 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK178 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK179 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK180 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK181 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK182 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK183 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK184 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK185 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK186 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK187 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK188 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK189 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK190 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK191 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK192 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK193 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK194 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK195 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK196 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK197 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK198 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK199 | 10 Gbps | 10 km | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |
| DhK200 | 10 Gbps | 300 m | LC Duplex Pluggable | 19 mm | -40 to 70 °C | |