

# DIGITUS Cabo de ligação DisplayPort com amplificador

**AK-340105-100-S**  
**EAN 4016032433699**



**Displayport connection cable, DP, w/ amp. M/M, 10.0m, w/lock, UHD 4K, DP 1.2, CE, bl, gold**

Este cabo HD áudio/vídeo digital de elevado desempenho serve para a ligação de computadores ou computadores portáteis a monitores com interface DisplayPort.

**Ligação A/V ao longo de grandes distâncias, sem perda de sinal**


- Suporta funcionalidade DP 1.2
- Compatível com Ultra HD 4K
- Suporta formatos de vídeo: 4K/2K@24 Hz, 4K/2K @30, 4K/2K @60 Hz ou 3D
- Suporta resolução vídeo: 4K (3840x2160)@60Hz, Full HD (1920x1080)@120Hz
- Formatos áudio suportados: Áudio DVD, SACD, Dolby Digital Plus, TrueHD e dts-HD
- Não necessita de alimentação externa

### Attributes

- Assortment: DisplayPort Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- HDTV Standard: Ultra HD 4K
- Hoods: plastic
- Interlock: Snap fastener
- Wire material: CU
- Length: 10 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	14.14	38.10	31.10	30.20	35,784.30
Packaging Unit Inside	1	1.41	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.41	33.50	33.50	5.00	5,611.25
Net single without Packaging	1	0.91	23.00	23.00	5.00	0.00

### More images:

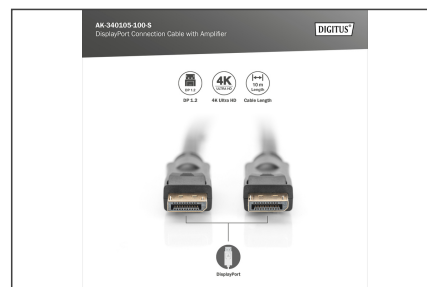

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)