

# DIGITUS Cabo conversor Mini DisplayPort 3 em 1

AK-340419-002-S  
EAN 4016032433804



**DisplayPort converter cable, mDP - HDMI+DVI+VGA M-F/F/F, 0,2m, 3 in 1 Multi-Media, CE, bl, gold**

Com este adaptador, pode ligar o seu computador de secretária ou portátil com interface DisplayPort a todos os ecrãs compatíveis com HDMI, VGA ou DVI.

**Não é necessário comprar 3 adaptadores únicos.**

- Suporta 4K/2K com 30Hz
- Taxa de dados DisplayPort 1.2 até 5,4 Gbit/s
- Taxa de dados HDMI 1.4 até 3Gbit/s
- Interfaces DVI e VGA que suportam Full HD 1080P@60Hz
- Resolução VGA até WUXGA 1920x1200 ppp (reduced blanking)
- Instalação Plug and Play

**Attributes**


- Assortment: DisplayPort Cables

- AWG: 28/30
- Color cable: black
- Color connector: black
- Connector 1: Mini DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.2
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	10.60	38.00	30.00	31.00	35,340.00
Packaging Unit Inside	10	0.53	15.00	15.00	7.00	1,575.00
Packaging Unit Single	1	0.05	12.00	12.00	2.00	288.00
Net single without Packaging	1	0.05	28.50	4.00	1.60	0.00

**More images:**



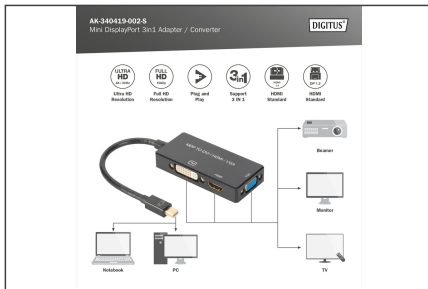

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)