

# DIGITUS Cabo conversor HDMI 3in1

AK-330403-002-S  
EAN 4016032433866



## HDMI converter cable, HDMI - DP+DVI+VGA M-F/F/F, 0.2m, 3 in 1 Multi-Media, CE, bl, gold

Com este adaptador, pode ligar o seu computador de secretária, portátil ou leitor de Blu-Ray com interface HDMI tipo A a todos os ecrãs compatíveis com DisplayPort, VGA ou DVI. O sinal de entrada HDMI é convertido num sinal de DisplayPort, DVI ou VGA.

### Não é necessário comprar 3 adaptadores únicos.



- Suporta 4K/2K com 30Hz
- Taxa de dados HDMI 1.4 até 3Gbit/s
- Em conformidade com a especificação de DisplayPort 1.2a
- Resolução VGA até WUXGA 1920x1200 ppp (reduced blanking)
- Interfaces DVI e VGA que suportam Full HD 1080P@60Hz
- A porta USB (tipo A) pode opcionalmente ser utilizada para o fornecimento de energia.
- Instalação Plug and Play

### Attributes

- Assortment: HDMI Cables
- AWG: 28/30
- Cable type: Dual-Link
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A/F + DVI-D(24+1)/F
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI
- HDTV Resolution max.: 4096 x 2160 Pixel, 60Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	13.80	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.69	27.94	40.64	8.50	9,651.59
Packaging Unit Single	1	0.07	20.00	15.50	1.70	527.00
Net single without Packaging	1	0.06	23.70	4.00	1.60	0.00

### More images:

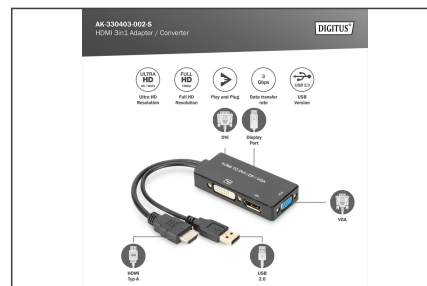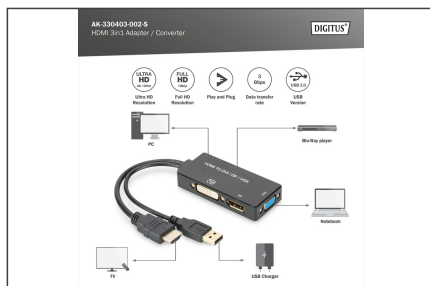

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)