

DIGITUS Cabo de ligação USB Type-C, Gen2, Type-C 90° para A

AK-300147-010-S
EAN 4016032438281



USB Type-C connection cable, C 90° angled to A M/M, 1.0m, Gen2, 3A, 10GB, 3.1 Version, CE, BI

Para a ligação de dispositivos USB externos (com conector fêmea C, p. ex., computador, Tablet ou Smartphone) a um anfitrião USB (p. ex. computador, computador portátil). Taxa de transferência de dados até 10 Gbps (Superspeed+).

Para uma sincronização e carregamento super rápidos


- Transferência de dados SuperSpeed+ até 10 Gbit/s - 20 vezes mais rápida do que USB 2.0
- Suporte fonte de alimentação até 3A
- Suporta a especificação USB PD (Power delivery).
- Conector USB Type-C com ângulo de 90°
- Conector Type-C- utilizável dos dois lados
- Compatibilidade reversa de USB 2.0 e 1.1

Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 3.0 / 3.1
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	9.80	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.49	30.00	20.00	7.00	4,200.00
Packaging Unit Single	1	0.05	13.00	24.00	4.50	1,404.00
Net single without Packaging	1	0.05	13.00	12.00	4.50	0.00

More images:

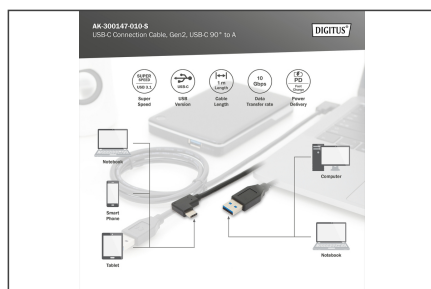

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com