


# **DIGITUS Single Port 10G SFP PCIe Network Card**

DN-10161 EAN 4016032445180



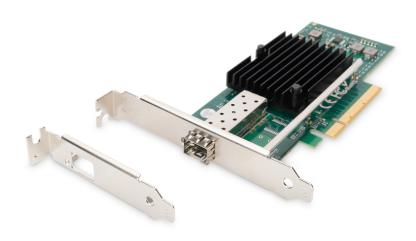

# SFP+ 10G PCI Express Card Low profile bracket, Intel JL82599EN chipset

With this 10-Gigabit Fiber Optic network card you have a cost efficent solution for connecting your workstation to your network using the SPF+ Tranceiver of your choice. Due to the Intel chipset you have a reliable solution offering you features like up to 15.5K jumbo frames, IP, TCP and UDP checksum offloading (IPv4, IPv6) capabilities.

# Connect your workstation directly to your 10G fiber optic network

• IEEE 802.1Q marcado VLAN

## **Package contents**


- · Suporte baixo perfil
- Manual de instruções
- Controlador CD

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	4.20	23.50	30.00	36.00	25,380.00
Packaging Unit Inside	1	0.21	21.00	14.50	3.30	1,004.85
Packaging Unit Single	1	0.21	21.00	14.50	3.30	1,004.85
Net single without Packaging	1	0.09	14.70	12.00	2.30	0.00


### More images:













#### Safety notes

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com