


DIGITUS Cat. 7A class FA, S/FTP, Twisted Pair installation cable, 500 m, duplex, 1500 MHz

DK-1744-A-VH-D-5-P
EAN 4016032463726

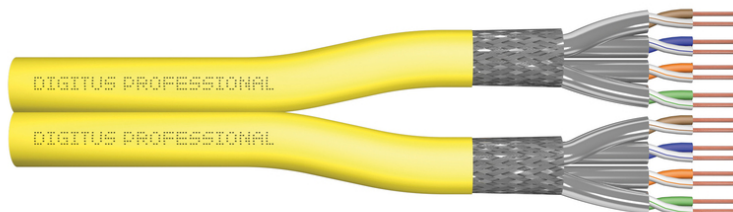

CAT 7A S-FTP installation cable, 1500 MHz Cca, AWG 22/1, 500 m, DX, color yellow

The DIGITUS® cat. 7A S/FTP installation cable features the following cable structure 4x2x AWG22/1 and achieves a transmission frequency of up to 1500 MHz. The halogen-free cable sheath complies with the standards IEC 60332-3-24, FRNC-C, LSZH-3 and BauPVO Euroclass Cca. The cable is suitable for structured building cabling in secondary and tertiary areas. Complies with the standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1.

Future-oriented standards and high-end quality for your network.

- Physical properties
- Cable: Bare copper wire, AWG 22/1
- Insulation: SFS-PE (foamed polyethylene sheath)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-covered polyester film, 100% coverage
- Overall shielding: Copper mesh
- Outer sheath: Dca to CCA complies with EN 50575
- Outer sheath thickness (nominal): 0.60 mm (CCA)
- Outer sheath color: Sulfur yellow (RAL 1028)
- Mechanical properties
- Cable grip: 150 N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C

- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- External diameter simplex (nominal): 8.0 mm (CCA)
- Weight (kg/km): 68.0 kg (CCA)
- Electrical properties
- Impedance: 100 ± 5 ohm @ 1-1000 MHz
- Capacity: 40 pF/m nominal @ 1 KHz
- Capacity unbalance (pair earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 Gohm x km min.
- DC resistance: 72 ohm/km max. (2% max. non-balanced resistance)
- Loop resistance: 147 ohm/km max. (2% max. non-balanced resistance)
- Operating voltage: 72 VDC max.
- Insertion loss: 80 dB
- Phase delay: 450 nS/100 m max.
- Signal delay: 10 nS/100 m max.
- Segregation classification: "d" in accordance with EN 50174-2
- NVP: 75%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 500 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	70.75	50.00	53.00	53.00	140,450.00
Packaging Unit Inside	1	70.75	50.00	53.00	53.00	140,450.00
Packaging Unit Single	1	70.75	50.00	53.00	53.00	140,450.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:




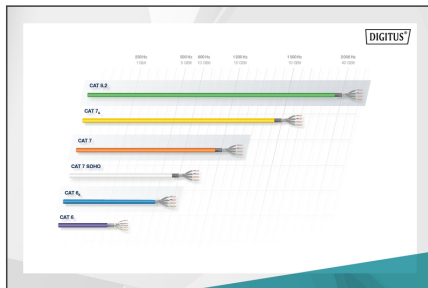


Table with 4 columns: CAT 6/6A, CAT 7, CAT 7A, CAT 7A S/FTP. Includes parameters like B2ca, Cca, Dca, Eca, and a legend for Cca, stb, d1, a1.

GHMT PREMIUM Zertifikat Nr. s588g-20. Includes category 7a and a table of performance parameters.

Table titled 'Leistungsparameter Transmitter Parameter'. Columns: FREQ, ATT, NEXT, PL NEXT, AGC, PL AGC, IL, RL NEXT, PL RL NEXT. Rows: 1, 10, 100, 1000, 10000, 100000, 1000000.

Table with two columns: Technische Spezifikation / Technical Specification and Mechanische Eigenschaften / Mechanical Properties. Rows include dimensions, weight, and material.

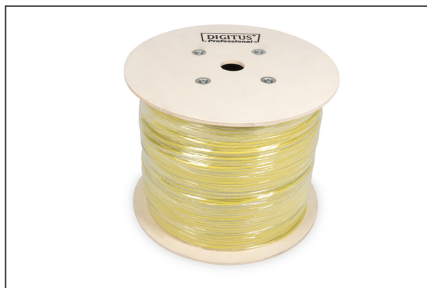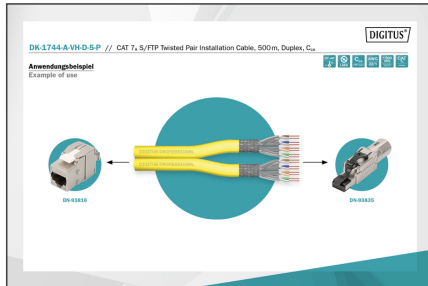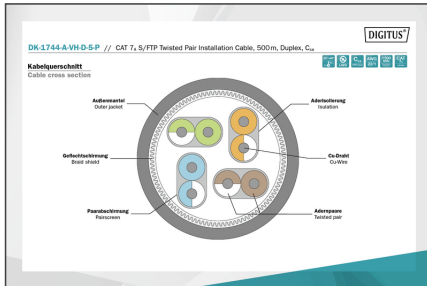

Product specification for CAT 7A S/FTP Twisted Pair Installation Cable, 500m, Duplex, Cca. Includes icons for AWG 22/1, 1500 MHz, CAT 7, and Cca class.