


DIGITUS Cat.7 S/FTP installation cable, 250 m, simplex, Dca-s1a d1 a1

DK-1743-VH-250
EAN 4016032480792

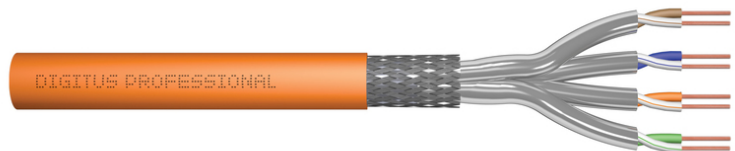

CAT 7 S-FTP Installationskabel, 1200 MHz Dca (EN 50575), AWG 23/1, 250 m box, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.


Melhor desempenho e melhor qualidade de ligação com a rede.


- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 250 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Single	1	15.19	40.00	40.00	30.00	48,000.00
Net single without Packaging	1	13.98	20.00	38.00	27.20	0.00

More images:

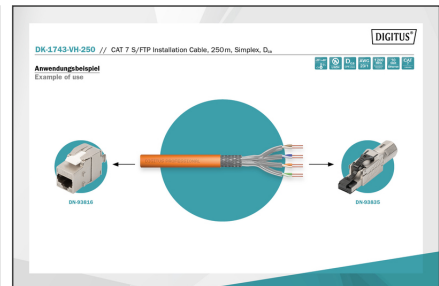

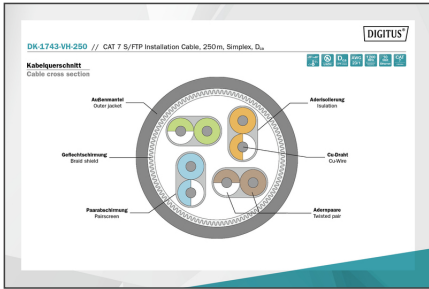

Produktinformation Product Information

Produktname Product Name	DK.1743-VH-250	Produktbeschreibung Product Description	DK.1743-VH-250
Hersteller Manufacturer	Digitus	Materialnummer Material No.	DK.1743-VH-250

Physikalische Eigenschaften Physical Properties

Material Material	PE (Polyethylene)	Temperaturbereich Temperature Range	-20°C to +70°C
Leitfähigkeit Conductivity	< 10 ⁻¹⁴ S/m	Dielektrizitätskonstante Dielectric Constant	~2.3

Elektrische Eigenschaften Electrical Properties


Bandbreite Bandwidth	100 MHz	Übertragungsdistanz Transmission Distance	250m
Impedanz Impedance	100 Ω	Reflexionskoeffizient Reflection Coefficient	< -20 dB

Mechanische Eigenschaften Mechanical Properties

Bruchdehnung Elongation at Break	100%	Bruchkraft Tensile Strength	100 N
Bruchenergie Toughness	100 J/m ²	Bruchzeit Time to Break	100 s

Leistungsmerkmale Transmission Properties

Parameter	Unit	Value
Attenuation	dB/100m	1.5
Return Loss	dB	20
Shielding Effectiveness	dB	100

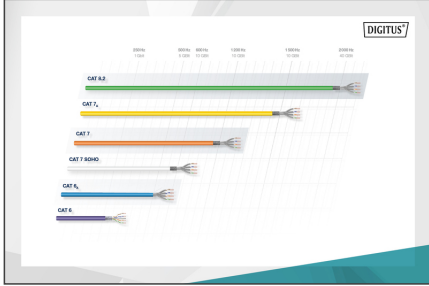

Digitus

Category	Performance	Shielding	Shielding Effectiveness
B2 Cat 8	100 Gbps	Yes	> 100 dB
C Cat 7	10 Gbps	Yes	> 100 dB
D Cat 6	10 Gbps	No	> 100 dB
E Cat 5	1 Gbps	No	> 100 dB

