

DIGITUS® Audio Headset Adapter, 3.5 mm jack to 2x 3.5 mm socket

DB-510320-002-S

EAN 4016032481324



Stereo 3.5mm Headset Adapter, M to 2*F Aluminum Housing ,Gold plated, NYLON Jacket 0,2m

The Digitus Audio Headset Adapter comprises a 3.5 mm jack plug and two jack sockets. This adapter makes it possible to connect a headset with two 3.5 mm jack plugs (microphone + headphones) to your device (PC, notebook etc.) with a single 3.5 mm audio output. The microphone and headphone input are marked on the jacks.

The Headset Adapter has two 3.5 mm connections for separate headphone and microphone connection and can be connected to the single/individual audio connection of a notebook.

- Y distributor cable from 3.5 mm jack plug to 2x 3.5 mm jack (microphone + headphones)





- Aluminum housing
- Nylon mesh
- Gold-plated plug

Attributes

- AWG: 28
- Color cable: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 2x 3.5mm stereo jack
- Connector surface: gold-plated
- Length: 0.2 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	4.08	34.00	43.00	41.00	59,942.00
Packaging Unit Inside	1	0.03	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.03	11.00	11.00	4.00	484.00
Net single without Packaging	1	0.01	10.00	10.00	3.00	0.00

More images:

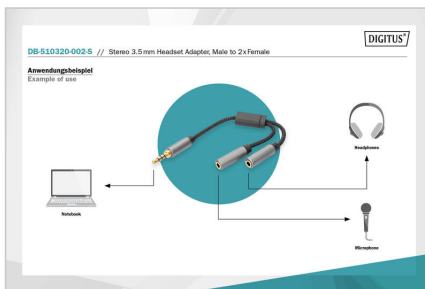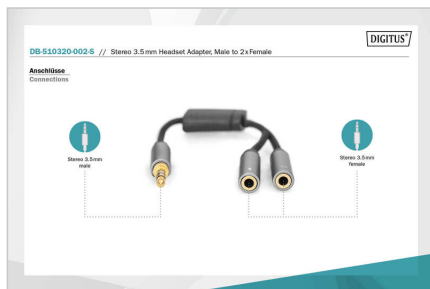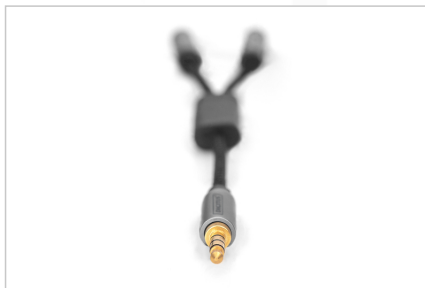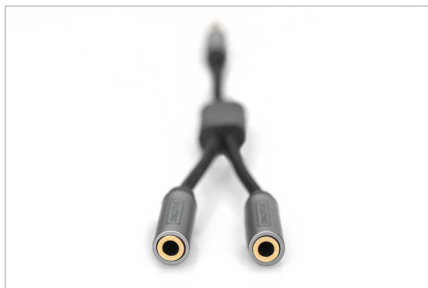

Safety notes

- Ao ligar ou desligar o cabo, segure-o exclusivamente pelo conector e não puxe diretamente pelo cabo.
- Os cabos não devem ser dobrados bruscamente nem em ângulos apertados, uma vez que isso pode danificar os fios internos e provocar avarias.
- Certifique-se de que os cabos não fiquem sob tensão, uma vez que isso pode danificar o isolamento e os condutores no interior do cabo.
- Certifique-se de que os cabos não sejam instalados em locais onde possam sofrer danos mecânicos com facilidade.
- Os cabos não devem ser utilizados em ambientes com temperaturas extremamente elevadas ou muito baixas. Verifique as especificações do produto relativas à temperatura máxima de funcionamento do cabo.
- Verifique regularmente se os cabos apresentam danos visíveis, tais como fissuras, dobras ou sinais de desgaste. Os cabos defeituosos devem ser substituídos imediatamente, para evitar avarias, curto-circuitos ou mesmo choques elétricos.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com