

DIGITUS EV charging cable, 7,5 m, type 2 to type 2

DK-3P16-075
EAN 4016032481430



EV charging - Three Phase, 400 V, 16 A, 7,5 m Type 2 to Type 2 Standard Charger cable

The DIGITUS DK-3P16-075 car charging cable allows you to easily connect any vehicle with type 2 plug to public charging stations or wallboxes with charging socket. The type 2 charging cables are certified according to EN 62196-1:2014, EN 62196-2:2017 and protection class IP55.

DIGITUS DK-3P16-075 (7,5 m) high quality flexible cable, offers in longer length, the comfort of charging in Home (garage) and also in public charging station

- Type: Straight cable
- Cable length: 7,5 m
- Usuable length: 7,5 m



- Charging cable type: 5 x 2,5 mm² + 1 x 0,75 mm²
- Color: Black
- Jacket: TPU
- Connector: EN 62196-2 type 2
- Rated voltage: 400 V
- Rated power: 11 kW
- Rated current: 16 A
- Connection phases: 3
- Operating temperature: -30°C+50°C
- Protection class: IP55 (water-jet protected)

Package contents

- 1 x Charger Cable
- Quick Installation Guide

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 5 | 18.25 | 63.00 | 38.00 | 38.00 | 90,972.00 |
| Packaging Unit Inside | 1 | 3.65 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 3.65 | 35.00 | 35.00 | 15.00 | 18,375.00 |
| Net single without Packaging | 1 | 2.97 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

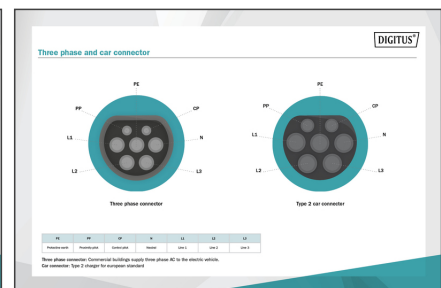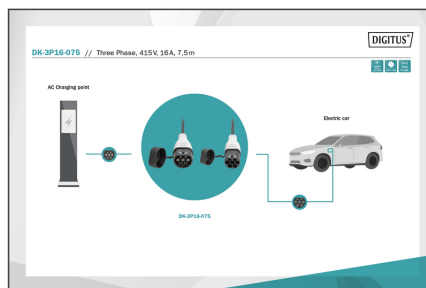



DIGITUS

| | |
|----------------------------|-----------------------------|
| 11 kW Max. Output Power | 16 A Max. Output Current |
| THREE Phase Connection | 7,5 m TPE Cable Length |

DK-3P16-075
EV Charging Cable, 7,5m, Type 2 to Type 2

