

DIGITUS® Variable Notebook/Tablet Stand with 6-port USB-C™ Docking Station

DA-90429

EAN 4016032482307



Notebook Stand with USB C Hub 3x USB 3.0, 1x 4K HDMI, 1x RJ45, 1x PD Charging

The variable Notebook/Tablet Stand with 6-port USB-C™ Docking Station from DIGITUS® combines ergonomic design and connectivity. The stand enables individual height and angle adjustment, perfectly adapted to the needs of the user. The docking station offers six ports to expand the connections (1x HDMI 2.0, 3x USB-A 3.0, 1x RJ45, 1x USB-C™ PD) of your notebook/tablet. Manufactured of high-quality aluminum, the stand features elegant and modern design along with high load-bearing capacity of up to 7.5 kg, and its own weight ensures additional stability. The design of the carrier plate was conceived to ensure additional heat dissipation for notebooks.

Individual and ergonomic adjustment options + additional connections for your notebook/tablet

- Carrier plate with heat dissipation: W 28 x D 23 cm, load-bearing capacity: 7.5 kg
- Individual height adjustment: 5.6 - 16.5 cm, 2x hinges each can be inclined by 180° for individual angle adjustment
- Connections Docking Station:
- 1x HDMI (4K/60Hz) - connection of external monitor

- 3x USB-A 3.0/5 Gbps data transfer - connection of peripheral equipment
- 1x RJ-45 - Gigabit Ethernet (10/100/1000) for connection to network/internet
- 1x USB-C™ (PD 3.0) - 100W max. power supply
- 1x USB-C™ 3.1 Gen. 1 - host connection
- Compatible with: Windows (11/10/8/7), MacOS (10.6 or higher), iPadOS (15.3.1 or higher), Android (7.0 or higher), Chrome OS (46.0.2490.82 or higher)
- High-quality aluminum design
- Rubber pads on the carrier plate protect your devices - on the stand they ensure the required stability
- USB-C™ connection cable: 60 cm
- Operating temperature: 0-40°
- Dimensions (folded together): W 28 x D 25.7 x H 5.6 cm
- Weight: 1.15 kg
- Color: Silver




Package contents

- 1x Variable Notebook/Tablet Stand with 6-port USB-C™ Docking Station
- 1 x USB-C™ connecting cable, 60 cm
- 1x QIG

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	14.95	33.00	54.00	32.00	57,024.00
Packaging Unit Inside	1	1.50	0.00	0.00	0.00	0.00
Packaging Unit Single	1	1.50	26.20	29.50	6.00	4,637.40
Net single without Packaging	1	1.14	22.00	27.80	5.30	0.00

More images:

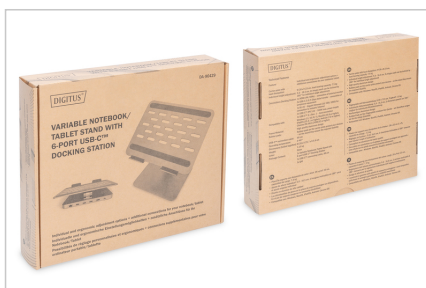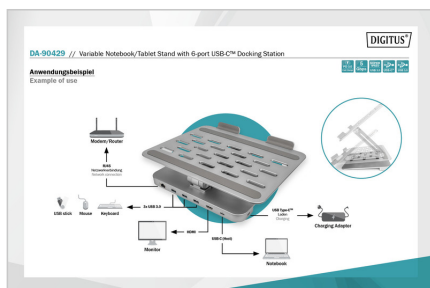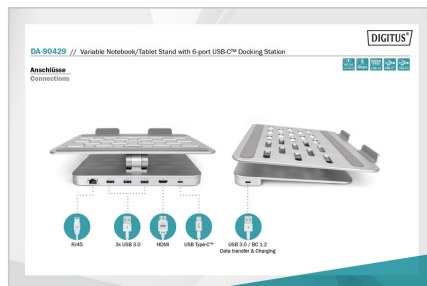

Safety notes

- Por favor, leia todo o manual antes de iniciar a montagem e a instalação. Em caso de dúvidas sobre as instruções ou avisos, contacte o revendedor local.
- **ATENÇÃO:** A utilização com produtos que excedam o peso permitido pode causar danos ou, eventualmente, ferimentos.
- Os suportes devem ser instalados de acordo com as instruções de montagem. Uma montagem incorreta pode causar danos ou ferimentos.
- Utilizar equipamento de segurança e ferramentas adequadas. A montagem do produto só deve ser realizada por profissionais.
- Este produto pode ser instalado em paredes com estrutura de vigas, em betão maciço ou em pedra.
- As superfícies de apoio devem ser capazes de suportar com segurança todo o peso dos equipamentos e de todos os componentes adicionais.
- Utilize apenas os parafusos de montagem fornecidos e **NÃO APERTE OS PARAFUSOS COM DEMASIADA FORÇA.**

- Este produto contém peças pequenas que podem representar um risco de asfixia em caso de ingestão. Mantenha estas peças fora do alcance das crianças.
- Este produto deve ser utilizado apenas em espaços interiores. A utilização do produto em espaços exteriores pode causar ferimentos e danos.
- **IMPORTANTE:** Antes da montagem, verifique se todas as peças recebidas correspondem à lista de peças. Caso haja peças danificadas ou em falta, solicite peças de substituição ao revendedor local.
- **MANUTENÇÃO:** Verifique regularmente se o suporte está seguro e estável (de preferência a cada três meses)

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com