

DIGITUS® 4-port universal USB charging adapter, 65W GaN

DA-10180

EAN 4016032486978



4-Port USB-charging adapte, 65W GaN 65W, 2x USB-C, 2x USB-A, PD3.0

The 4-port USB charging adapter from DIGITUS® is a powerful charging solution for everyday use with the latest GaN technology. The high-performance adapter has a maximum output power of 65W. Equipped with 2x USB-C and 2x USB-A ports, it supports a total output of up to 65W and can therefore charge 4 devices at the same time. It is compatible with the most common fast charging protocols and therefore compatible with almost all devices. The integrated overvoltage, overcurrent and short-circuit protection ensures greater safety. Furthermore, the integrated overheating protection prevents possible overloading and damage to the charger or the connected devices.

High-performance 4-port GaN charging adapter with an output of up to 65W for USB-C/USB-A devices of all kinds

- Connection: 2x USB-C™ + 2x USB A
- Supports Power Delivery 3.0 and PPS function with 65W charging power
- Input Voltage: 100~240 V AC, 50/60 Hz

- Output voltage: USB-C1/C2: PD 65W (PD: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A)
- Output voltage: USB A1/A2: 12W (5V/2.4A)
- Output voltage: USB-C1+C2+A1+A2: C1: 35W + C2: 20W + A1: 5W + A2: 5W
- Over Voltage Protection / Over Current Protection / Over Load Protection / Short Circuit Protection
- Protection against overheating with automatic shutdown and recovery (auto-recovery)
- Dimensions: L 75 x W 40.5 x H 40.5 mm
- Colour: black / silver
- Weight: 150 g
- Attention: When multiple devices are connected, the adapter will choose the appropriate fast charge protocol to split the power for each device optimally, resulting in 2-3 times disconnection before fast charge begins


Package contents

- 1x universal charging adapter
- 1x QIG (Quick Installation Guide)
- 1x power cord

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	12.30	26.00	33.00	43.00	36,894.00
Packaging Unit Inside	1	0.31	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.31	15.50	10.20	4.70	743.07
Net single without Packaging	1	0.23	3.10	5.50	5.50	0.00

More images:

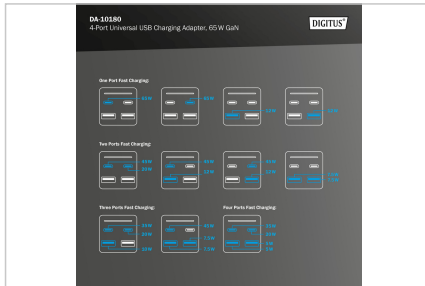

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com