

DIGITUS Wall-mounted enclosure - SOHO, Slim

DN-19 04U-PB
EAN 4016032200109



Wall mounting cabinet, SOHO, slim, 145x525x475 mm 3U rotatable, 2U fix, color grey (RAL 7035)

The SOHO, Slim wall-mounted enclosures are ideal for housing active and passive components. They are characterized by simple and time-saving installation. The modern design fits into any office or home. The enclosure has 2 separate installation options: A rotatable vertical 3U rail is attached to the front. Alternatively, this can also be positioned horizontally or at an angle. A horizontal 2U rail is attached to the rear (fixed), which can be used for passive network components, for example. The punched-out mounting holes in the entire lower housing area also allow components that are not 483 mm (19") compatible to be installed (e.g. DSL routers, etc.). Alternatively, a mounting plate can be fitted, which is available as an option.

Настенные шкафы DIGITUS® спроектированы, разработаны и произведены с учетом высоких требований в сфере инфраструктуры информационных технологий.

- Класс защиты IP20
- Вентиляционные отверстия для активной, а также пассивной вентиляции

Attributes


- Cabinet type: Wall mounting cabinet, home automation
- Color: light grey, RAL 7035
- Depth: 475 mm
- Front door: Glass door, single opening
- Load capacity: 30 kg
- Side panels: Both sides
- Units: 5
- Width: 525 mm
- IP protection class: IP20
- Mounted: yes


Package contents

- 2 x key

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	9.50	50.00	53.00	16.00	42,400.00
Packaging Unit Inside	1	9.50	50.00	53.00	16.00	42,400.00
Packaging Unit Single	1	9.50	50.00	53.00	16.00	42,400.00
Net single without Packaging	1	8.50	47.50	52.50	14.50	0.00

More images:

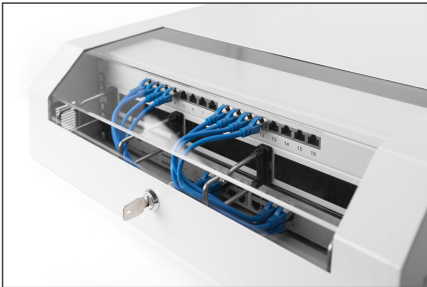

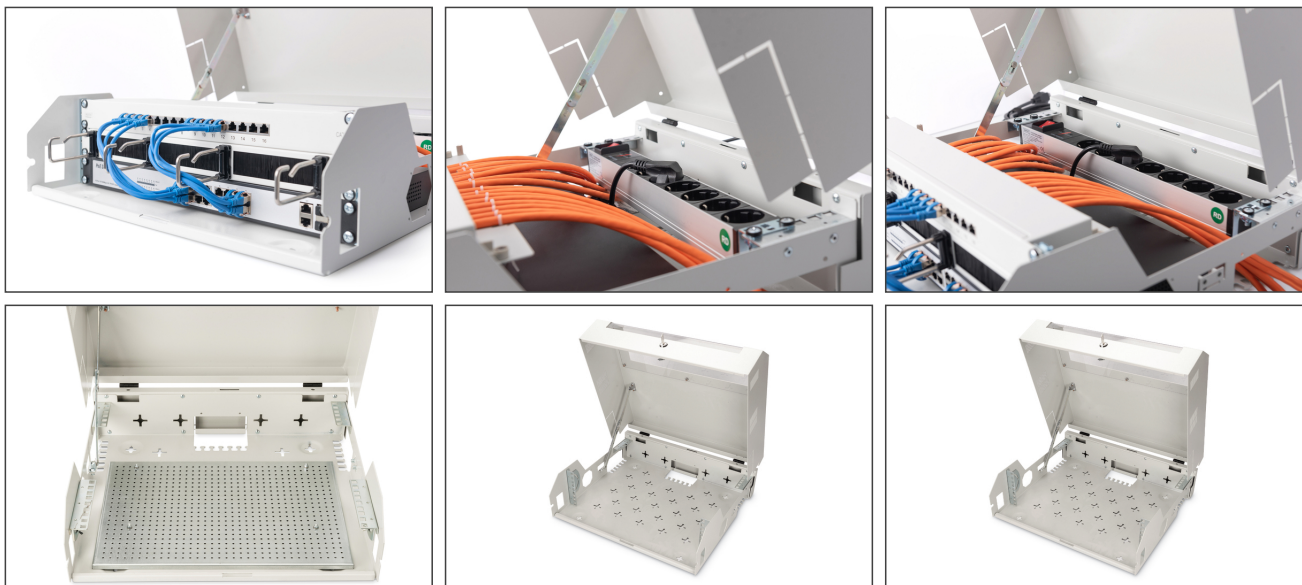

Safety notes

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com