


# DIGITUS Fiber Optic Multimode Patch Cord, OM 3, SC / SC

DK-2522-02/3 EAN 4016032248545



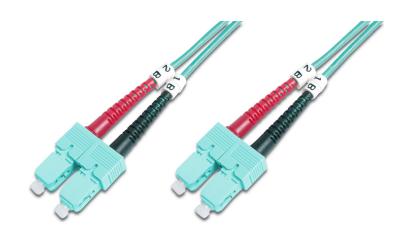

#### FO patch cord, duplex, SC to SC MM OM3 50/125 æ, 2 m

FO patch cord, duplex, SC to SC,MM OM3 50/125  $\mu,\,2$  m

## Отличная производительность и качество связи для Вашей сети.

- LSOH
- В одиночной упаковке, с протоколом тестирования

#### **Attributes**

- Assortment: Fiber Optic Patch Cables
- · Boot: two-color

- Cable diameter: 2 mm
- Cable type: I-VH 2G50/125μ
- Color cable: aqua
- Connector 1: SC
- Connector 2: SC

  File and aleren OM2
- Fiber class: OM3Fiber diameter: 50/125µ
- Mode: Multimode
- Packaging: DIGITUS Polybag
- Length: 2 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.80	41.00	41.00	28.00	47,068.00
Packaging Unit Inside	15	0.98	19.00	19.00	12.00	4,332.00
Packaging Unit Single	1	0.07	17.00	17.00	1.00	289.00
Net single without Packaging	1	0.05	15.00	15.00	1.00	0.00


### More images:











#### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- · eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect
  against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- · To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal
  quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum
  operating temperature of the cable
- · Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

#### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com