DIGITUS DIGITUS Gigabit медиапреобразователь, RJ45 / SFP

DN-82130
EAN 4016032293163

Gigabit Ethernet Media Converter, SFP SFP Open Slot, without SFP Module

Медиапреобразователи DIGITUS® идеально подходят перехода от меднокабельных сетей к оптоволоконным. Теперь можно передавать сигналы по оптоволоконным сетям на несколько километров без обновления всей сетевой инфраструктуры. Широкая линейка устройств позволяет удовлетворять любые индивидуальные потребности. Интуитивный интерфейс обеспечивает быструю и легкую установку. Многолетний опыт работы нашей компании и широкий ассортимент продукции позволяют DIGITUS® стать вашим надежным партнером.

Преобразователь идеально подходит для передачи данных по оптоволокну

- Преобразование проводных сетевых сигналов в оптоволоконные
- Высокое качество и максимальная отказоустойчивость
- Разъемы: 1 порт RJ45, 1 порт SFP
- Расстояние до 80 км
- Функция автоматического распознавания кабеля – Auto-MDI-/MDI-X
- Автоматическое распознавание полудуплекса и дуплекса
- Светодиодные индикаторы диагностики для контроля статуса и работы
- Поддерживаемые стандарты: IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3z Gigabit Ethernet
- 2 МБ буфер данных
- Диапазон рабочих температур: 0 to 60°C
- Размеры (Д x Ш x В): 95 x 70 x 26 мм
- Вес: 200 г
- Автономный преобразователь с внешним питанием
- Напряжение источника питания: 5 В, пост. тока
- Эксклюзивный модуль SFP

Attributes

- Connector 1: RJ45
- Connector 2: SFP
- Mode: Copper
- Distance (km): Depending on module
- Industrial usage: no
- Broadcasting Mode: Depending on module
- PoE injector: no
- Ethernet speed: Gigabit

Package contents

- Медиа конвертер
- Краткое практическое руководство
- Блок питания

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	9.00	30.00	27.00	55.00	44,550.00
Packaging Unit Inside	1	0.45	5.50	13.00	24.00	1,716.00
Packaging Unit Single	1	0.45	5.50	13.00	24.00	1,716.00
Net single without Packaging	1	0.00	2.60	7.00	9.50	0.00

More images:

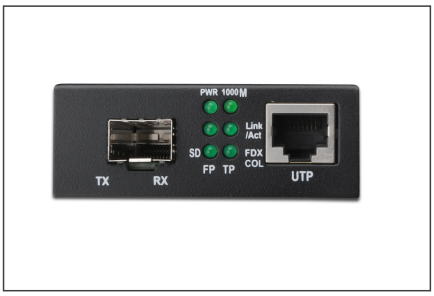

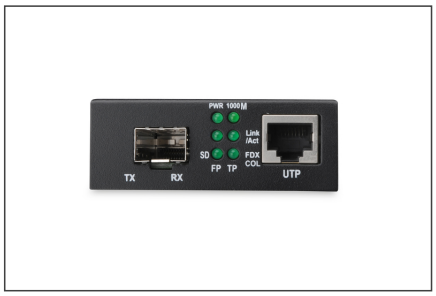

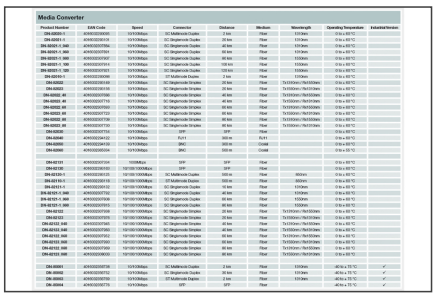

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com