


# DIGITUS Fiber Optic Singlemode Patchcable SC ( APC ) to LC ( PC )

DK-292SCA3LC-03  
EAN 4016032309284

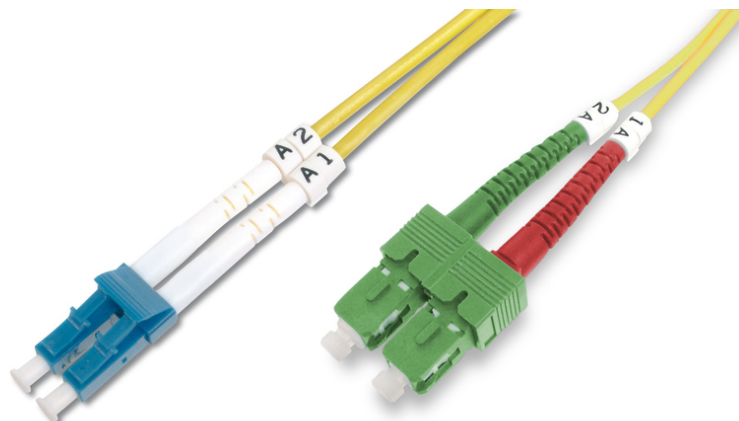

FO patch cord, duplex, SC (APC) to LC (PC) SM OS2 09/125 æ, 3 m

FO patch cord, duplex, SC (APC) to LC (PC), SM OS2 09/125 µ, 3 m

**Отличная производительность и качество связи для Вашей сети.**

- LSOH
- В одиночной упаковке, с протоколом тестирования

#### Attributes

- Assortment: Fiber Optic Patch Cables
- Boot: single-color

- Cable diameter: 2 mm
- Cable jacket: LSOH
- Cable type: I-VH 2E9/125µ
- Color cable: yellow
- Connector 1: SC (APC)
- Connector 2: LC
- Fiber class: OS2
- Fiber diameter: 9/125µ
- Mode: Singlemode
- Packaging: DIGITUS Polybag
- Length: 3 m

#### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	8.40	19.50	19.50	12.00	4,563.00
Packaging Unit Inside	1	0.07	1.00	20.00	29.00	580.00
Packaging Unit Single	1	0.07	1.00	20.00	29.00	580.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

#### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

[info@assmann.com](mailto:info@assmann.com)