DIGITUS Усилитель сигнала 4K HDMI

DS-55900-1
EAN 4016032370871

4K HDMI Repeater up to 30m HDMI High Speed compatibel and HDCP compliant

Хотите увеличить расстояние действия сигнала HDMI без потери качества? В таком случае усилитель HDMI представляет собой идеальное решение. Усилитель HDMI позволяет соединять между собой Ваши устройства HDMI на большом расстоянии. Усилитель HDMI Digitus увеличивает дальность действия сигнала HDMI до 30 метров и поддерживает превосходное разрешение 4K (30 Гц) для получения безупречного качества изображения. Кроме того, компактный корпус обеспечит незаметное размещение устройства. Более того - повторитель HDMI не требует внешней подачи электропитания.

Увеличивает дальность действия сигналов HDMI вплоть до 30 м

- Усилитель сигнала HDMI до 30 м
- Увеличивает дальность действия сигналов HDMI без потери качества и скорости передачи данных
- Поддерживает разрешающую способность 4K для отличного качества изображения
- Малый и компактный корпус - идеален для незаметного размещения
- Не требуется внешний источник питания
- Разрешающая способность видеоизображения до 4K (4K2K при 24 Гц)
- Поддерживает 3D
- Полоса пропускания: 3,4 Гбит/с
- Глубина цвета: вплоть до 16 битов с разрешающей способностью 1080 пикселей
- Размеры: Д 4,8 x Ш 2,6 x В 1,4 см
- Цвет: черный

Attributes

- HDTV Standard: Ultra HD 4K
- Distance: 30 m
- KVM: no
- PoE (Power over Ethernet): no

Package contents

- Усилитель сигнала HDMI
- Краткое руководство по установке

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	7.76	61.00	26.00	39.00	61,854.00
Packaging Unit Inside	20	0.78	25.00	12.00	17.00	5,100.00
Packaging Unit Single	1	0.04	11.80	7.50	2.30	203.55
Net single without Packaging	1	0.02	2.60	4.70	1.70	0.00

More images:

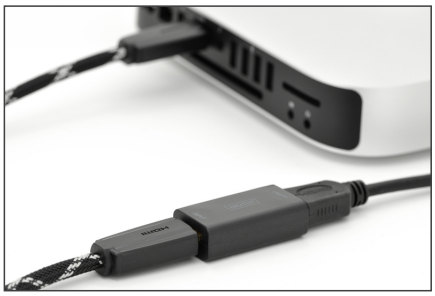

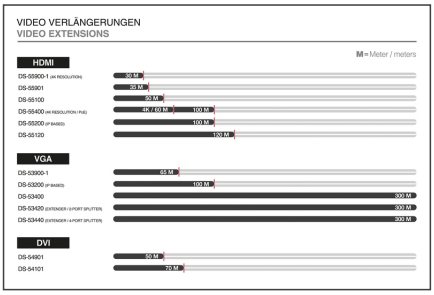

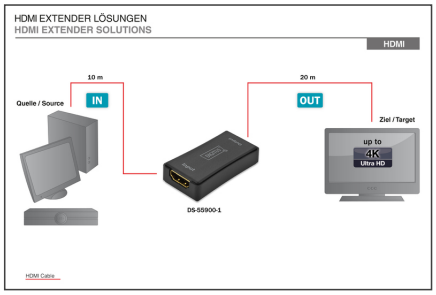

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com