


DIGITUS® CAT 6A S/FTP patch cable, PUR (TPU)

DK-1644-A-PUR-100
EAN 4016032434740

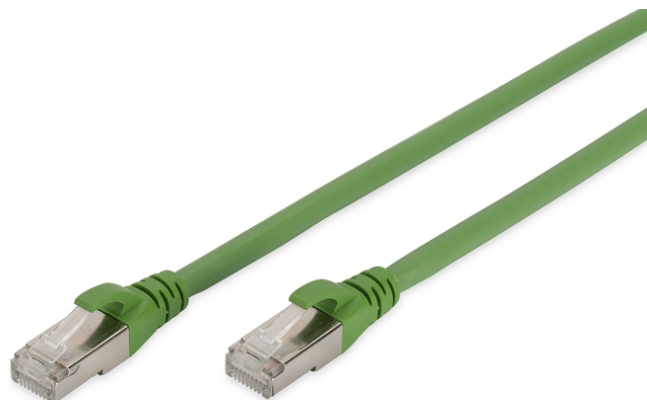

CAT 6A S-FTP patch cord, Cu, PUR AWG 26/7, 10.00 m, green, (similar to RAL 6018)

The category 6A, S/FTP patch cables offer good resistance to oil with their PUR sheath and are therefore suitable for industrial use. Further properties of the PUR jacket are UV resistance and self-extinguishing in case of fire. The DIGITUS® Category 6A Class EA patch cables are manufactured and tested in accordance with the ISO/IEC 11801 and DIN EN 50173 CAT 6A standard. They guarantee that the cable installation complies with the ISO & EN Channel specification and offer excellent performance in DIGITUS® CAT 6A cabling. The performance has been tested up to 500 MHz, including performance characteristics such as near-end crosstalk ("NEXT"). They have been specially developed to fully meet all requirements in the various application areas. Each cable is equipped with a molded anti-kink grommet with strain relief. The grommet also has a latching lever protection, which prevents the cable from getting caught and the latching lever from breaking off the plug.

Die Kabel sind für den Einsatz in industriellen Umgebungen geeignet. Die PUR-Hülle bietet einen guten Schutz vor Öl und ist selbstverlöschend. Die Kabel sind nach dem ISO/IEC 11801 und dem DIN EN 50173 CAT 6A Standard gefertigt und getestet. Sie garantieren, dass die Kabelinstallation den ISO & EN Channel Spezifikationen entspricht und eine hervorragende Leistung in der DIGITUS® CAT 6A Verkabelung bietet. Die Leistung wurde bis zu 500 MHz getestet, einschließlich der Leistungsmerkmale wie dem Nahende-Kreuztalk ("NEXT"). Sie wurden speziell entwickelt, um alle Anforderungen in den verschiedenen Anwendungsbereichen vollständig zu erfüllen. Jedes Kabel ist mit einem geformten Anti-Knick-Gewinde mit Spannungsrelief ausgestattet. Das Gewinde hat auch einen Verriegelungshebel-Schutz, der verhindert, dass das Kabel sich fängt und der Verriegelungshebel vom Stecker abbricht.

- 2 8-polige RJ45 (8P8C)
- 2800000000 0 00000000 00 000000, 000000000 0 00000000
- 000000 000000 00 00000000
- 0000000000 0000000000: 0000 (Cu)

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Packaging: DIGITUS Polybag
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 10 m
- Color: green
- Jacket: PUR
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	10.58	46.00	31.00	20.00	28,520.00
Packaging Unit Inside	5	1.76	25.00	33.00	49.00	40,425.00
Packaging Unit Single	1	0.35	5.00	19.00	27.00	2,565.00
Net single without Packaging	1	0.31	1,000.00	1.20	1.30	0.00

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating

temperature of the cable

- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com