


DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-050-B-10
EAN 4016032442172

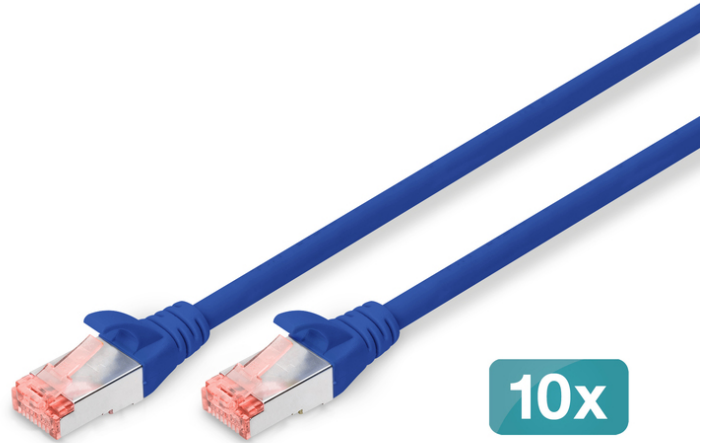

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, 10 pieces, color blue

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, 10 pieces, color blue. This product is a high-quality network cable designed for reliable data transmission. It features a blue jacket and modular RJ45 (8/8) plugs on both ends. The cable is constructed with 4 x 2 AWG 27/7 twisted pairs, providing excellent performance for network applications. The shielding is S-FTP, consisting of pairs in metal foil and braid shielding, which helps reduce crosstalk and electromagnetic interference. The length of the cable is 5 meters, and it is sold in a pack of 10 pieces. The cable is made of copper (Cu) and is suitable for use in environments where low smoke and zero halogen (LSZH) are required. The cable is also compatible with ISO/IEC 11801 standards. The package is made of Digitus polypropylene (PP) and is designed for easy handling and storage. The cable is also suitable for use in environments where low smoke and zero halogen (LSZH) are required. The cable is also compatible with ISO/IEC 11801 standards. The package is made of Digitus polypropylene (PP) and is designed for easy handling and storage.






- 2 RJ45 (8P8C)
- LSZH jacket, low smoke and zero halogen, flame retardant
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Package: Digitus Polypropylene (PP)
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 5 m
- Color: blue
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	8.50	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	1.70	22.00	30.00	36.00	23,760.00
Packaging Unit Single	1	1.70	2.20	17.00	25.00	935.00
Net single without Packaging	1	0.15	500.00	1.20	1.30	0.00

More images:

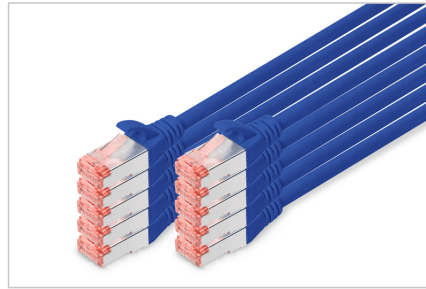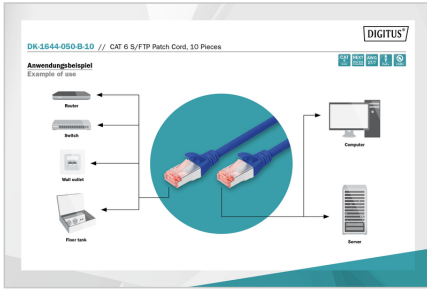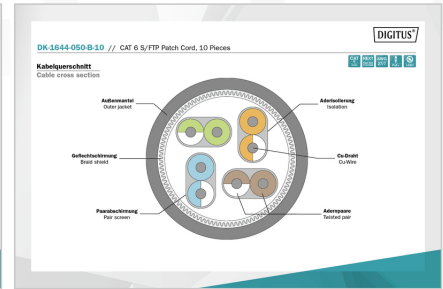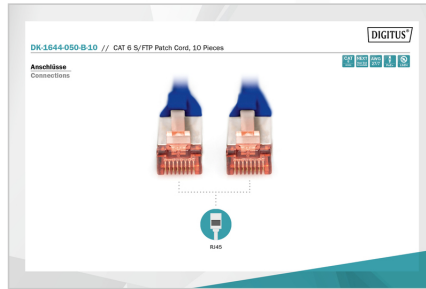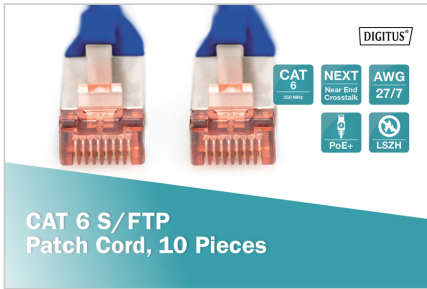

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com