

Digitus® CAT 6 S/FTP patch cord, 5 units

DK-1644-100-WH-5
EAN 4016032442394



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 10 m, 5 pieces, color white

Digitus® CAT 6 S/FTP patch cord, length 10 m, 5 pieces, color white. This patch cord is made of high-quality copper conductors and is shielded with a metal foil and braid. It is suitable for use in environments with high electromagnetic interference (EMI). The patch cord is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments. The patch cord is made of 4 x 2 AWG 27/7 twisted pair conductors. The patch cord is made of 100% copper conductors. The patch cord is made of 100% copper conductors. The patch cord is made of 100% copper conductors.




- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, low smoke, zero halogen
- 100% copper conductors
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 10 m
- Color: white
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	30	9.70	54.00	20.00	30.00	32,400.00
Packaging Unit Inside	5	1.62	14.00	30.00	36.00	15,120.00
Packaging Unit Single	1	0.32	2.80	19.00	27.00	1,436.40
Net single without Packaging	1	0.29	10.00	1.20	1.30	0.00

More images:

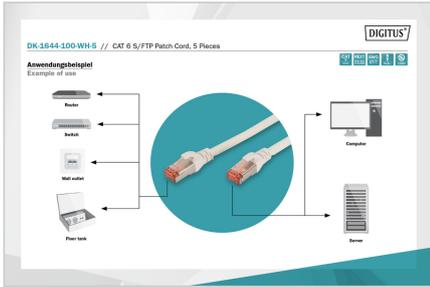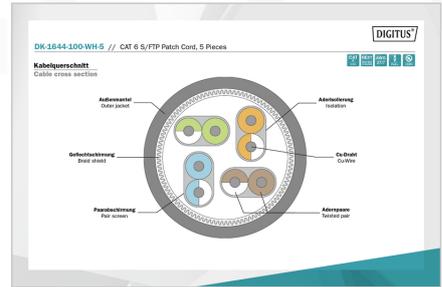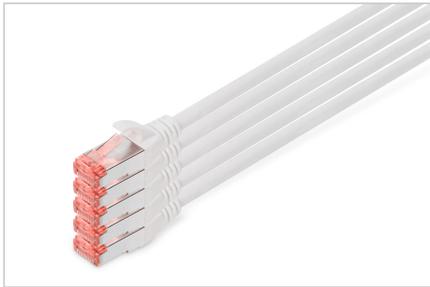

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com