

DIGITUS CAT 6 U/FTP Slim patch cord

DK-1624-015S
EAN 4016032467878



CAT 6 U-FTP slim patch cord, Cu, LSZH AWG 28/7, length 1.5 m, color grey

DIGITUS® slim patch cords are characterised by their small outer diameter and flexible sheath. Slim design enables versatile use in your network. Moreover, the DIGITUS® Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6, because of the transparent red colored connector.

Enables flexible and space-saving cabling in your network

- 2x RJ45 connectors (8P8C)
- Covers with kink protection, strain relief and latch protection




- Length indication on hoods
- Inner conductors: Copper (Cu)
- Anti-kink sleeve: molded-on
- Connector 1 type: RJ45 8(8)
- Connector 2 type: RJ45 8(8)
- Flame retardant version: yes
- Latch protection: yes
- NVP value: 76
- Oil resistant to EN 60811-404: no
- Bending radius: 4D (outer diameter x 4)

Attributes

- Configuration: 1:1
- Category: CAT 6
- Shielding: U-FTP, pairs in metal foil
- Length: 1.5 m
- Color: grey
- Jacket: LSOH
- Slim Version: yes
- Structure: 4 x 2 AWG 28/7, twisted pair
- Flat Version: no

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 150 | 9.40 | 46.00 | 33.00 | 28.00 | 42,504.00 |
| Packaging Unit Inside | 10 | 0.63 | 10.30 | 25.00 | 30.00 | 7,725.00 |
| Packaging Unit Single | 1 | 0.06 | 1.60 | 14.00 | 25.00 | 560.00 |
| Net single without Packaging | 1 | 0.05 | 150.00 | 1.20 | 1.30 | 0.00 |

More images:

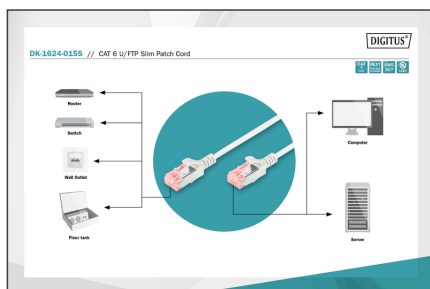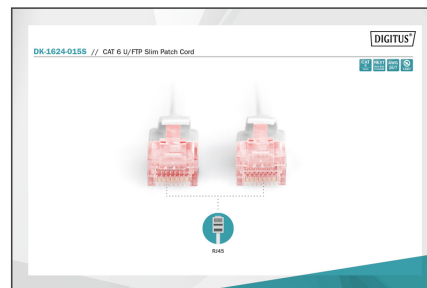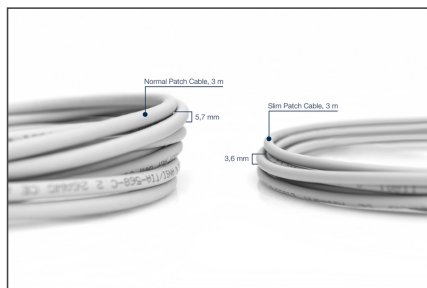

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com