

# DIGITUS Active DisplayPort Adapter / Converter, DP to DVI

DB-340414-001-S  
EAN 4016032468783



## DisplayPort Adapter Cable, Type DP-DVI (24+5) M/F, 0.15m, w/interlock, Full HD, DP 1.1 , bl

The active DisplayPort Adapter from DIGITUS® converts DisplayPort signals to DVI signals. Resolutions in Full HD (1080p) are supported with frequencies of up to 60 Hz. HDCP 1.3 and 24Bit DeepColor are also supported, as well as DVI 1.0. The installed preamplifier and double shielding ensure first-class transmission qualities to HD display of all kinds. The DVI plug is fully utilized (24+5).

### Converts DisplayPort signals to DVI signals

- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

### Attributes

- AWG: 32
- Color cable: black
- Connector 1: DP, plug
- Connector 2: DVI-I, (24+5), jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: plastic
- Interlock: Snap fastener
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding


### Package contents

- 1 x Active DisplayPort to DVI Adapter / Converter

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	8.10	51.00	26.00	26.00	34,476.00
Packaging Unit Inside	20	2.03	27.00	25.00	17.00	11,475.00
Packaging Unit Single	1	0.10	23.00	7.50	2.30	396.75
Net single without Packaging	1	0.09	2.50	4.50	1.50	0.00

### More images:



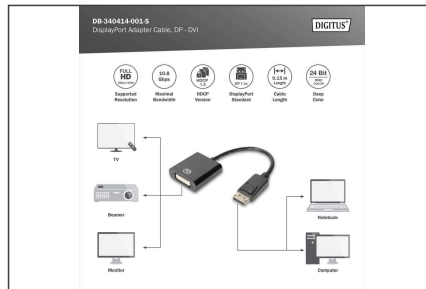

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)