

# DIGITUS USB-C™ Dock, 5 Port

DA-70892

EAN 4016032472551



## Type-C to HDMI (4K/30Hz) USB-AX3/RJ45 Adapter

With the DIGITUS® USB-C™ Adapter, you have the option of connecting an additional HDMI® display to your existing device with a USB-C™ port. This allows you to reproduce your content on a large monitor, projector or TV in 4K resolution, for example – easy streaming with minimal effort. The Gigabit Ethernet Port (RJ45) enables high-speed data transmission in your network, transmit data at up to 1000 Mbps! Two additional USB 3.0 connections are available for you to connect other peripheral equipment. For instance, USB memory sticks or a mouse/keyboard combination can be used here. You can even connect an additional USB hub to increase the number of USB connections. Thanks to its compact design, the DIGITUS® Docking Station is easy to travel with – perfect for business trips and presentations on HDMI® displays of all kinds.

## Extend your notebook, tablet or smartphone with 5 additional interfaces – HDMI®, RJ45 (LAN) & 3 x USB 3.0

- Input: 1 x USB-C™
- Connections: 3 x USB 3.0, 1 x HDMI®, 1 x Gigabit RJ45 (LAN)
- RJ45 Port: 10/100/1000 Mbps
- Supports USB 3.0 SuperSpeed (5 Gbps max.)
- HDMI® version: 1.4b
- HDCP version: 1.4
- Operating temperature: 0 °C to +45 °C
- Operating humidity: 10% to 85% RH (non-condensing)
- Storage temperature: -10 °C to +70 °C

- Storage humidity: 5% to 90% RH (non-condensing)
- Power supply: USB-C™
- Length of USB-C™ connection cable (host): 15 cm
- Dimensions: L 11.5 x W 2.3 x 1.7 cm
- Weight: 50.5 g
- Color: Gray
- Not all USB-C™ ports support all functions of the USB Type-C™ standard. Make sure that your notebook's USB-C™ port supports the DisplayPort Alternate Mode (DP Alt Mode)

## Attributes



- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- Housing: Aluminum
- LAN connector (RJ45): yes
- Card reader: no
- Number of audio ports: 0
- Number of display ports: 1
- Number of network ports: 1
- Number of USB A ports: 3
- Number of USB-C ports: 0
- Number of video ports: 1
- USB-C Products: yes
- Video connection ports: HDMI

## Package contents

- 1 x USB-C™ Dock, 5 Port
- 1 x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	6.40	26.00	57.00	28.00	41,496.00
Packaging Unit Inside	20	1.60	24.00	27.00	14.00	9,072.00
Packaging Unit Single	1	0.08	2.50	11.50	18.50	531.88
Net single without Packaging	1	0.06	2.30	11.50	1.70	0.00

**More images:**

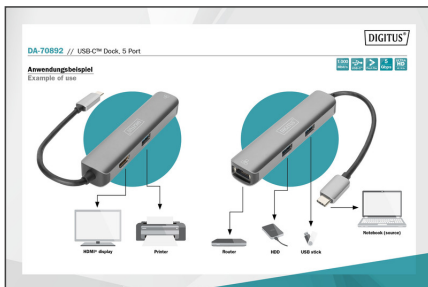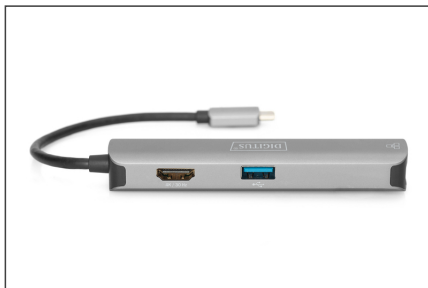

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)