


DIGITUS CAT 5e SF/UTP patch cord

DK-1532-150/R EAN 4016032199878



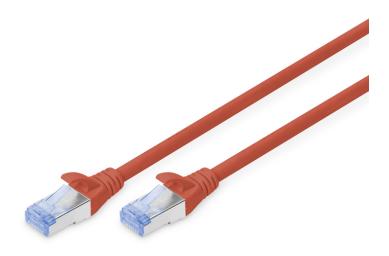

CAT 5e SF-UTP patch cable, PVC AWG 26/7, length 15 m, color red

The DIGITUS® Category 5e Class D patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 5e specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 5e cabling. The performance is tested up to 100 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking.You can easily identify the Category 5e, because of the transparent blue colored connector.

Future-oriented standards and high-end quality for your network

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Yapılandırma: 1:1
- Kategori: CAT 5e
- Koruma: SF-UTP, folyo ve örgü koruma
- Uzunluk: 15 m
- Renk: kırmızı
- Ince Versiyon: no
- Kılıf: PVC
- Yapı: 4 adet 2 AWG 26/7, bükümlü çift

| Logistics | | | | | | |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 25 | 11.00 | 37.00 | 37.00 | 27.00 | 36,963.00 |
| Packaging Unit Inside | 5 | 2.20 | 46.00 | 32.00 | 19.00 | 27,968.00 |
| Packaging Unit Single | 1 | 0.44 | 4.00 | 23.00 | 28.00 | 2,576.00 |
| Net single without Packaging | 1 | 0.44 | 0.00 | 0.00 | 0.00 | 0.00 |

www.digitus.info Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

1