


DIGITUS CAT 7 S-FTP çift bükümlü kurulum kablosu

DK-1744-VH-5
EAN 4016032441731



CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 500 m drum, simplex, or

İkincil ve üçüncül alanda yapısal kablo tesisatı oluşturmaya uygundur.




Ağınız için mükemmel performans ve bağlantı kalitesi.

- Fiziksel tanım
- Temel iletken: sert AWG 23/1, çıplak tavlı bakır 0.57mm nom
- Toplam izole iletken sayısı: 8, bükülü 4 çift
- Renk kodu: mavi-beyaz, turuncu-beyaz, yeşil-beyaz, kahverengi-beyaz
- Tel çiftlerinin ekranlaması: alüminyum lamine polyester film, %100 kaplar
- Renk: turuncu (RAL 2008)
- Mekanik özellikler

- Çekme yüklemesi: 150Nmaks.
- Elektrik özellikleri
- Ortalama empedans: 1MHz - 600MHz'de $100 \pm 50 \Omega$
- DC dayanıklılığı: 72 Ohm/kmmaks. (%2maks. dayanıklılık dengesizliği)
- Çeşitler: Bükümlü Çift Kurulum Kabloları
- Kategori: CAT 7
- Koruma: S-FTP, metal folyo ve örgü korumalı çiftler
- CPR: Cca
- Uzunluk: 500 m
- Renk: turuncu
- Kılıf: LSOH
- Yapı: 4 adet 2 AWG 23/1, sabit bükümlü çift

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	27.00	54.00	54.00	34.00	99,144.00
Packaging Unit Inside	1	27.00	54.00	54.00	34.00	99,144.00
Packaging Unit Single	1	27.00	54.00	54.00	34.00	99,144.00
Net single without Packaging	1	55.00	54.00	54.00	34.00	0.00

More images:

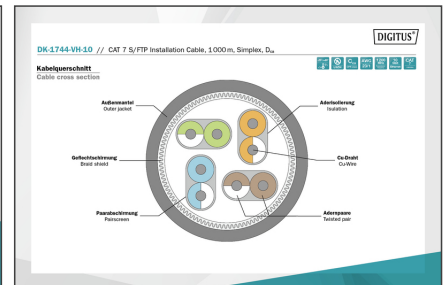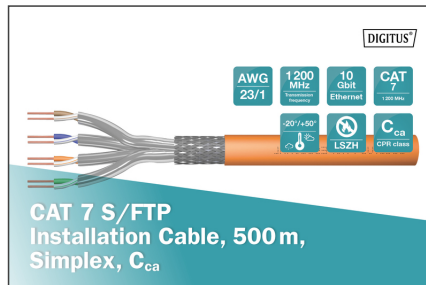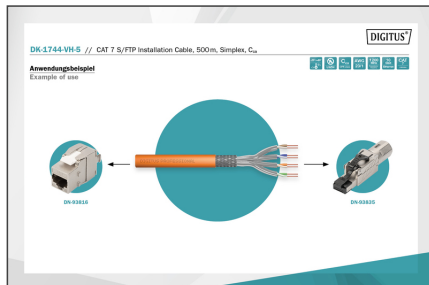

Produktbeschreibung Product Information	Physikalische Spezifikationen Physical Properties
<p>Bestandteile 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Materialien 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) 1x RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Technische Eigenschaften Electrical Properties RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Mechanische Eigenschaften Mechanical Properties RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p>	<p>Farbe RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Material RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Abmessungen RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p> <p>Werkstoffe RJ45-Stecker (RJ45-Stecker, RJ45-Stecker) RJ45-Stecker (RJ45-Stecker, RJ45-Stecker)</p>

Leistungsmerkmale Transmission Properties										
10BASE-T	100BASE-T	1000BASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T
100	100	100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100	100	100


Certificate
No. 15121-19-1

Category 7

Zertifikat
No. 15121-19-1

Kategorie 7

GHMT Logo and other certification details.

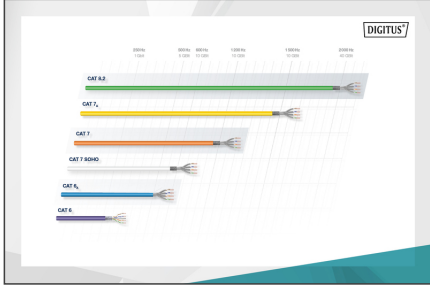

Off-Exchange Application	Standardization	Linkage/Performance	Support for applications	Transmission
B2ca	ISO/IEC 11801-3	1+	• Symmetrisch • Hochgeschwindigkeit	S
Cca	ISO/IEC 11801-3	3	• Symmetrisch • Hochgeschwindigkeit	d
Dca	ISO/IEC 11801-3	3	• Symmetrisch • Hochgeschwindigkeit	a

