


# DIGITUS Modular plugs for round cable, CAT 5e

**A-MO 8/8 SRS**  
**EAN 4016032065180**

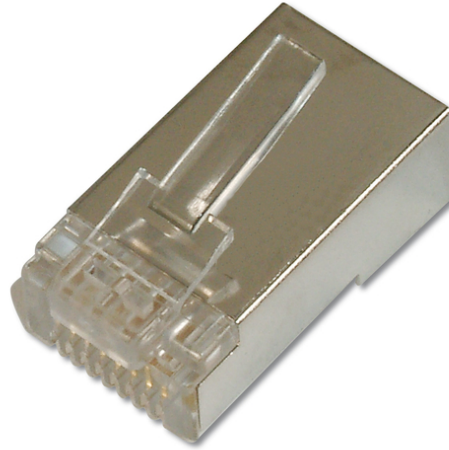

## Modular Plug, for round cable, 8P8C, CAT 5 shielded

These modular plugs can be used to establish quick and simple connections.

- Layout performance: CAT 5e, 10/100Base-T, 1GBase-T
- Area of application: Patch cable assembly
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- UL certified
- Technical properties:

- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Material connector body: Polycarbonat, clear
- Connector contact: Phosphor bronze, brass 0.6 µ gold-plated
- Flammability: UL 94V-2
- Physical properties:
- Insertion force: ≤ 30 N
- Diameter Cu-Conductor: AWG (27/7 ... 24/7)
- Operating temperature: -40 °C to +80 °C
- Current carrying capacity: 1A -1.5A at 50 °C

| Logistics                    |                 |                |               |               |                |           |
|------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------|
|                              | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm³       |
| Packaging Unit Carton        | 5000            | 14.10          | 41.30         | 38.10         | 20.30          | 31,942.70 |
| Packaging Unit Inside        | 100             | 0.28           | 4.00          | 12.00         | 16.50          | 792.00    |
| Packaging Unit Single        | 1               | 0.00           | 2.20          | 1.10          | 0.70           | 1.69      |
| Net single without Packaging | 1               | 0.00           | 2.20          | 1.10          | 0.70           | 0.00      |