

DIGITUS mini GBIC (SFP) module, 155 Mbps, 2km

DN-81101

EAN 4016032324843



155Mbps SFP Module, Multimode LC Duplex Connector, 1310nm, up to 2km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

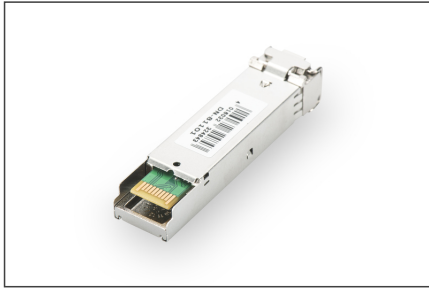
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE, Avaya, Mikrotik, ENTERASYS, FINISAR, FORCE 10, RIVERSTONE, Fortinet
- High quality and excellent reliability
- 155 Mbps maximum data rate
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant

- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a distance of up to 2km
- Suitable for 50/125µm and 62.5/125µm multimode fiber cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mode: Multimode
- Connector: LC
- Distance (km): 2
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Fast Ethernet

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	1.50	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.08	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.08	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

[illegible]