

DIGITUS HP-compatible SFP+ 10G SM 1310nm 10Km with DDM

DN-81201-01
EAN 4016032370031



10G SFP+ Module, Singlemode, DDM, HP-compatible LC Duplex Connector, 1310nm, up to 10km, HP

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable


- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission Power: Minimum -8 dBm, Maximum -0,5 dBm
- Sensitivity Receiving Power: Minimum -12,5 dBm
- For a distance of up to 10,0km
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C
- HP compatible
- HP-Aruba compatible
- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: HP
- Ethernet speed: 10 Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

More images:

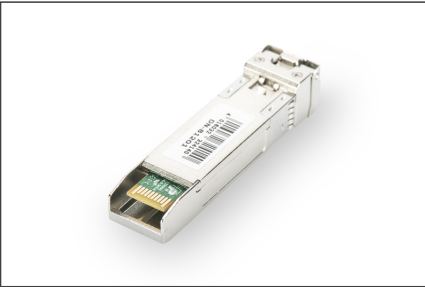

SFP Modules							
Product Number	Serial Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
Fast Ethernet							
DE-4010	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4012	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4014	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
SFP+							
DE-4016	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4018	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4020	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4022	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4024	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4026	4010000000000	10 Gbps	25 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
SFP							
DE-4028	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4030	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4032	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
Fast Ethernet							
DE-4034	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4036	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4038	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4040	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4042	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4044	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4046	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4048	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓
DE-4050	4010000000000	10 Gbps	10 km	LC Duplex OM3	1310nm	-40 to +70 °C	✓